



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification ⁷ : H04L 9/16		A1	(11) International Publication Number: WO 00/54456
			(43) International Publication Date: 14 September 2000 (14.09.00)
(21) International Application Number: PCT/FI00/00177 (22) International Filing Date: 8 March 2000 (08.03.00) (30) Priority Data: 990500 8 March 1999 (08.03.99) FI (71) Applicant (for all designated States except US): NOKIA MOBILE PHONES LTD. [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): VIALEN, Jukka [FI/FI]; Tyrsykykuja 3 B 13, FIN-02320 Espoo (FI). LONGONI, Fabio [IT/FI]; Visamäki 5 E 38, FIN-02130 Espoo (FI). (74) Agent: PATENTTITOIMISTO TEKNOPOLIS KOLSTER OY; c/o Kolster Oy Ab, Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).		(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, DZ, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KR (Utility model), KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

BEST AVAILABLE COPY

(54) Title: METHOD OF CIPHERING DATA TRANSMISSION IN A RADIO SYSTEM

(57) Abstract

The invention relates to a method of ciphering data transmission in a radio system, and to a user equipment using the method, and to a radio network subsystem using the method. The method includes the steps of: (602) generating a ciphering key; (604A) producing a ciphering mask in a ciphering algorithm using the ciphering key as an input parameter; (604B) using a logical channel specific parameter or a transport channel specific parameter as an additional input parameter to the ciphering algorithm; and (606) producing ciphered data by applying the ciphering mask to plain data.

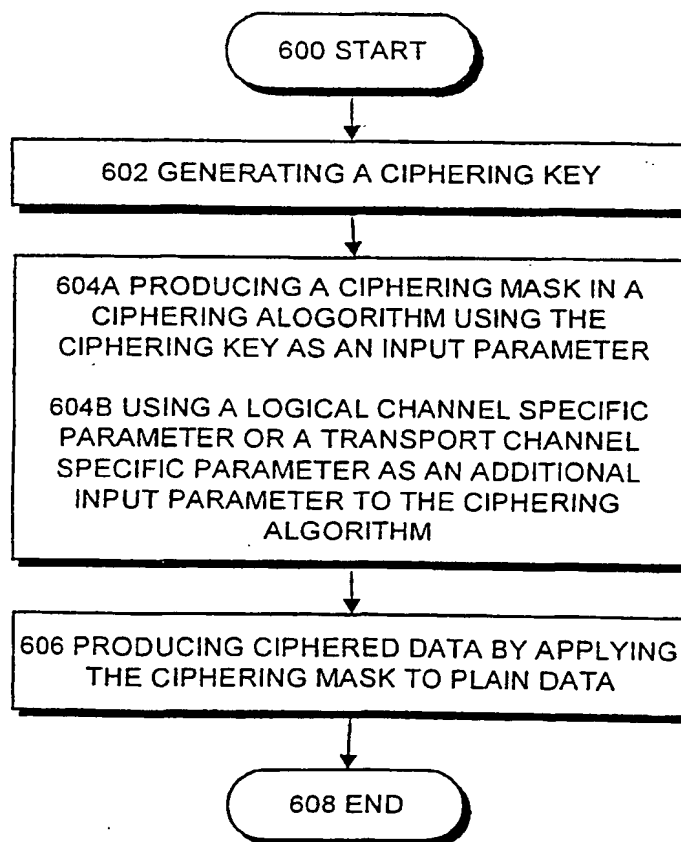

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

METHOD OF CIPHERING DATA TRANSMISSION IN A RADIO SYSTEM

FIELD OF INVENTION

The invention relates to a method of ciphering data transmission in a radio system.

5 BACKGROUND OF INVENTION

Ciphering is today used in many data transmission systems to prevent the data transmitted from falling into the hands of an unauthorized user. The ciphering has grown in significance in the past few years, particularly as wireless telecommunication has become more common.

10 The ciphering can be performed, for example, by encrypting the information to be transmitted in a transmitter, and by decrypting the information in a receiver. In the encryption means the information to be transmitted, for example a bit stream, is multiplied by a certain number of encryption bit patterns, whereby it is difficult to find out what the original bit
15 stream was if the encryption bit pattern used is unknown.

In a digital GSM system, for example, ciphering is performed on the radio path: a ciphered bit stream to be transmitted onto the radio path is formed by XORing data bits with ciphering bits, the ciphering bits being formed by an algorithm known per se (the A5 algorithm), using a ciphering key Kc.
20 The A5 algorithm encrypts the information transmitted on the traffic channel and the DCCH control channel.

The ciphering key Kc is set when the network has authenticated the terminal but the traffic on the channel has not yet been ciphered. In the GSM system the terminal is identified on the basis of the International Mobile
25 Subscriber Identity IMSI, which is stored in the terminal, or the Temporary Mobile Subscriber Identity TMSI, which is formed on the basis of the subscriber identity. A subscriber identification key Ki is also stored in the terminal. A terminal identification key is also known to the system.

In order that the ciphering would be reliable, information on the
30 ciphering key Kc must be kept secret. The cipher key is therefore transmitted from the network to the terminal indirectly. A Random Access Number RAND is formed in the network, and the number is then transmitted to the terminal via the base station system. The ciphering key Kc is formed by a known algorithm (the A5 algorithm) from the random access number RAND and the subscriber

identification key K_i . The ciphering key K_c is computed in the same way both in the terminal and in the network part of the system.

In the beginning, data transmission on a connection between the terminal and the base station is thus not ciphered. The ciphering does not start
5 until the base station system sends the terminal a cipher mode command. When the terminal has received the command, it starts to cipher data to be sent and to decipher received data. Correspondingly, the base station system starts to decipher the received data after sending the cipher mode command and to cipher the sent data after the reception and successful decoding of the
10 first ciphered message from the terminal. In the GSM system the cipher mode command comprises a command to start ciphering, and information on the algorithm to be used.

The problem in the known methods is that they have been designed for the present systems, wherefore they are inflexible and not suited for the
15 ciphering of data transmission in new systems, where several parallel services for one mobile station are possible. If we use the same ciphering mask twice for two or more parallel protocol data units that will be sent using the same air interface frame, then an eavesdropper may deduce a lot of information from the data streams. The amount of information that can be deduced depends on
20 the structure of the data streams. From random data that has no structure one cannot obtain any information, but usually there is a structure in the data, especially in the signaling data.

BRIEF DESCRIPTION OF INVENTION

It is an object of the invention to provide a method, and a user
25 equipment and a radio network subsystem implementing the method, solving the above problems. This is achieved with a method of ciphering data transmission in a radio system, comprising: generating a ciphering key; producing a ciphering mask in a ciphering algorithm using the ciphering key as an input parameter; producing ciphered data by applying the ciphering mask to
30 plain data. Using a logical channel specific parameter or a transport channel specific parameter as an additional input parameter to the ciphering algorithm.

The invention also relates to a user equipment, comprising: generating means for generating a ciphering key; a ciphering algorithm connected with the generating means for producing a ciphering mask using
35 the ciphering key as an input parameter; ciphering means connected with the

ciphering algorithm for producing ciphered data by applying the ciphering mask to plain data. The ciphering algorithm uses a logical channel specific parameter or a transport channel specific parameter as an additional input parameter.

5 The invention further relates to a radio network subsystem, comprising: generating means for generating a ciphering key; a ciphering algorithm connected with the generating means for producing a ciphering mask using the ciphering key as an input parameter; ciphering means connected with the ciphering algorithm for producing ciphered data by
10 applying the ciphering mask to plain data. The ciphering algorithm uses a logical channel specific parameter or a transport channel specific parameter as an additional input parameter.

 The preferred embodiments of the invention are claimed in the dependent claims.

15 Several advantages are achieved with the invention. In the solution of the present invention, ciphering and its properties can be flexibly controlled. The present invention enhances user security in new radio systems. This solution is also better than the known technique, which uses a long enough ciphering mask only once for each air interface frame, because it allows
20 distributed implementation of the needed functionality in the protocol stack.

BRIEF DESCRIPTION OF FIGURES

 In the following the invention will be described in greater detail by means of preferred embodiments and with reference to the attached drawings, in which

25 Figures 1A and 1B illustrate an example of a mobile telephone system;

 Figure 2A illustrates a transmitter and a receiver;

 Figure 2B illustrates transport channel coding and multiplexing;

 Figure 3 illustrates a frame structure;

30 Figures 4A, 4B and 4C show a block diagram of a ciphering environment according to the invention;

 Figure 5 illustrates a mobile station

 Figure 6 is a flow diagram illustrating a method according to the invention;

35 Figure 7A illustrates an example of a protocol stack;

Figure 7B illustrates an example of a protocol stack according to the invention;

Figure 7C illustrates mapping between logical channels and transport channels;

5 Figure 8 illustrates the structure of a Medium Access Control Layer Protocol Data Unit.

DETAILED DESCRIPTION OF INVENTION

The present invention can be used in different mobile telephone systems. In the following examples, the use of the invention is described in the
10 Universal Mobile Telephone System (UMTS) without restricting the invention to it. The examples illustrate the FDD (Frequency Division Duplex) operation of the UMTS, but do not restrict the invention to it.

With reference to Figures 1A and 1B, a typical mobile telephone system structure will be described. Figure 1B only comprises the blocks that
15 are essential for the description of the invention, although it is apparent to a person skilled in the art that a common mobile telephone system also comprises other functions and structures, which need not be discussed in greater detail here. The main parts of the mobile telephone system are: a core network CN, a UMTS terrestrial radio access network UTRAN, and a user
20 equipment UE. The interface between the CN and the UTRAN is called the Iu interface, and the interface between the UTRAN and the UE is called the Uu interface.

The UTRAN is composed of radio network subsystems RNS. The interface between two RNSs is called the Iur interface. The RNS is composed
25 of a radio network controller RNC and one or more node Bs B. The interface between the RNC and the node B is called the Iub interface. The reception area of the node B, i.e. cell, is denoted in Figure 1A by C.

As the presentation in Figure 1A is very abstract, it is clarified in Figure 1B by setting forth the parts of the GSM system that correspond to the
30 parts of the UMTS. It is clear that the presented mapping is by no means a binding one but an approximation, because the responsibilities and functions of the parts of the UMTS are still being planned.

Figure 1B illustrates a packet switched transmission via Internet 102
35 from a computer 100 connected with the mobile telephone system to a portable computer 122 connected with a user equipment UE. The user

equipment UE may be a fixedly mounted wireless local loop terminal, a vehicle-mounted terminal or a hand-held portable terminal, for example.

The infrastructure of the radio network UTRAN is composed of radio network subsystems RNS, i.e. base station subsystems. The radio network subsystem RNS is composed of a radio network controller RNC, i.e. a base station controller, and at least one node B, i.e. a base station, under the control of the RNC.

The node B comprises a multiplexer 114, transceivers 116, and a control unit 118 which controls the operation of the transceivers 116 and the multiplexer 114. The multiplexer 114 arranges the traffic and control channels used by a plurality of transceivers 116 on a single transmission connection lub.

The transceivers 116 of the node B have a connection to an antenna unit 120 which is used for providing a bi-directional (or sometimes one-way) radio connection Uu to a user equipment UE. The structure of the frames transmitted on the radio connection Uu is determined in detail and the connection is referred to as an air interface.

The radio network controller RNC comprises a group switching field 110 and a control unit 112. The group switching field 110 is used for switching speech and data and for connecting signaling circuits. The node B and the radio network controller RNC form a base station subsystem, which additionally comprises a transcoder, also known as a speech codec, or TRAU (Transcoder and Rate Adapter Unit) 108.

The division of the functions and the physical structures of the radio network controller RNC and the node B may differ according to the actual realization of the radio network subsystem. Typically, the node B implements the radio connection. The radio network controller RNC typically manages the following: radio resource control, inter-cell handover control, power control, timing and synchronization, and paging for user equipment.

The transcoder 108 is usually located as close to a mobile switching center 106 as possible because this allows speech to be transmitted between the transcoder 108 and the radio network controller RNC in a cellular radio network form, which saves transmission capacity.

The transcoder 108 converts different digital speech coding modes used between a public switched telephone network and a cellular radio network to make them compatible, for instance from the 64 kbit/s fixed network

form to another form (such as 13 kbit/s) of the cellular radio network, and vice versa. Naturally, the transcoding is carried out only for speech. The control unit 112 carries out call control, mobility management, collection of statistical data and signaling.

5 The core network CN is composed of the infrastructure belonging to the mobile telephone system which is not part of the UTRAN. Figure 1B illustrates two equipments, which are part of the core network CN, namely a mobile switching center 106, and a gateway mobile switching center 104, which handles mobile telephone system interfaces towards the outside world,
10 in this example towards the Internet 102.

 Figure 5 illustrates an exemplary structure of the user equipment UE. The essential parts of the user equipment UE are: an interface 504 to the antenna 502 of the user equipment UE, a transceiver 506, a control part 510 of the user equipment UE, an interface 512 to the battery 514, and a user
15 interface comprising a display 500, a keyboard 508, a microphone 516 and a speaker 518.

 Figure 2A illustrates the functioning of a radio transmitter/radio receiver pair. The radio transmitter may be located in the node B or in the user equipment. Correspondingly the radio receiver may be located in the user
20 equipment or in the node B.

 The upper portion of Figure 2A illustrates the essential functionality of the radio transmitter. Different services placed in a physical channel are, for example, speech, data, moving or still video picture, and the control channels of the system that are processed in the control part 214 of the radio
25 transmitter. The control part 214 is related to the control of the equipment itself and to the control of the connection. Figure 2A illustrates manipulation of two different transport channels 200A, 200B. Different services call for different source encoding equipment: speech for example calls for a speech codec. For the sake of clarity, source encoding equipment is not, however, presented in
30 Figure 2A.

 First the logical channels are ciphered in blocks 216A, 216B. In the ciphering, ciphered data is produced by applying a ciphering mask to plain data. Then the ciphered data is placed in the transport channel in blocks 200A, 200B. As later will be explained with reference to Figures 4A, 4C and 7B the
35 ciphering can be performed either for a logical channel or for a transport channel. Different channels are then channel encoded in blocks 202A and

202B. One form of channel coding is different block codes, one example of which is a cyclic redundancy check, or CRC. Another typical way of performing channel coding is convolutional coding and its different variations, such as punctured convolutional coding and turbo coding.

5 Having been channel encoded, the channels are interleaved in an interleaver 204A, 204B. The object of the interleaving is to make error correction easier. In the interleaving, the bits are mixed with each other in a predetermined fashion, so that transitory fading on the radio path does not necessarily make the transferred information unidentifiable.

10 Different signals are multiplexed in block 208 so that they can be sent using the same transmitter.

 The interleaved encrypted bits are then spread with a spreading code, scrambled with a scrambling code, and modulated in block 206, whose operation is described in detail in Figure 2B.

15 Finally, the combined signal is conveyed to the radio frequency parts 210, which may comprise power amplifiers and bandwidth restricting filters. An analog radio signal is then transmitted through an antenna 212 to the radio path Uu.

 The lower portion of Figure 2A illustrates the typical functionality of
20 a radio receiver. The radio receiver is typically a Rake receiver. The analog radio signal is received from the radio path Uu by an antenna 234. The received signal is conveyed to radio frequency parts 232, which comprise a filter that blocks the frequencies outside the desired frequency band. A signal is then converted in a demodulator 228 into an intermediate frequency or
25 directly into baseband, and in this form the signal is sampled and quantized.

 Because the signal in question is a multipath propagated signal, efforts are made to combine the signal components propagated on different multipaths in block 228, which comprises several Rake fingers.

 In a so-called rowing Rake finger, delays for the different multipath
30 propagated signal components are searched. After the delays have been found, different Rake fingers are allocated for receiving each of the multipath propagated signals by correlating the received signal with the used spreading code delayed with the found delay of that particular multipath. The different demodulated and despread multipaths of the same signal are then combined
35 in order to obtain a stronger signal.

 The received physical channel is then demultiplexed in a

demultiplexer 224 into data streams of different channels. The channels are then directed each to a de-interleaver 226A, 226B, where the received physical channel is then de-interleaved. After that the physical channels are processed in a specific channel decoder 222A, 222B, where the channel
5 coding used in the transmission is decoded. Convolutional coding is advantageously decoded with a Viterbi decoder. After this the transport channels are mapped to the logical channels in blocks 200A, 200B, or the other possibility is that the deciphering is performed for the transport channels. The channel decoded channels (logical or transport) are deciphered in blocks
10 220A, 220B by applying a ciphering mask to the received data. Each received logical channel can be further processed, for example, by transferring the data to the computer 122 connected with the user equipment UE. The control channels of the system are conveyed to the control unit 236 of the radio receiver.

15 Figure 2B illustrates how the transport channels are coded and multiplexed. In principle, Figure 2B is in part the same as Figure 2A but seen from another perspective. In blocks 240A, 240B a Cyclic Redundancy Check is added to each Transport Block. Interleaving is performed in two stages, in blocks 242A, 242B and 246. When two or more services having different
20 quality of service requirements are multiplexed into one or more physical channels, then service specific rate matching 244 is used. In rate matching the channel symbol rates are adjusted to an optimum level, where the minimum quality of service requirement of each service is fulfilled with the same channel symbol energy. Mapping of the transport channels to physical channels is
25 performed in block 248.

As the ciphering is the key issue in the current invention, its principle will be next described in more detail. In Table 1 the first row represents the plain data bits that have to be transmitted to the recipient. The bits on the second row constitute a ciphering mask. The ciphering mask is
30 applied to the plain data, usually by using the exclusive-or operation, i.e. XOR. The resulting ciphered data is on the third row. This ciphered data is sent through the air interface to the recipient. The recipient then performs deciphering by applying the same ciphering mask that has been used in the transmitter to the received data. The fourth row is a ciphering mask that is
35 summed with the third row by using the XOR operation. The resulting recovered data is presented on the fifth row. As we will see, the recovered

data is the same as the plain data.

Plain data	0	1	1	1	0	1	0	0	1	1	1	0	0	1	1	1	0	0	0
Ciphering mask	0	0	1	0	1	0	1	0	0	0	1	0	0	0	0	1	1	1	1
Ciphered data	0	1	0	1	1	1	1	0	1	1	0	0	0	1	1	1	1	1	1
Ciphering mask	0	0	1	0	1	0	1	0	0	0	1	0	0	0	0	1	1	1	1
Recovered data	0	1	1	1	0	1	0	0	1	1	1	0	0	1	1	1	0	0	0

Table 1

5 Figure 3 shows an example of a frame structure used on a physical channel. Frames 340A, 340B, 340C, 340D are given a running number from one to seventy-two, and they form a 720-millisecond long super frame. The length of one frame 340C is ten milliseconds. The frame 340C is divided into sixteen slots 330A, 330B, 330C, 330D. The length of slot 330C is 0.625
10 milliseconds. One slot 330C corresponds typically to one power control period, during which the power is adjusted for example by one decibel up or down.

The physical channels are divided into different types, including common physical channels and dedicated physical channels.

15 The common physical channels are used to carry the following transport channels: PCH, BCH, RACH and FACH.

The dedicated physical channels consist of dedicated physical data channels (DPDCH) 310 and dedicated physical control channels (DPCCH) 312. The DPDCHs 310 are used to carry data 306 generated in layer two of the OSI (Open Systems Interconnection) model and layers above it, i.e. dedi-
20 cated control channels (DCH). The DPCCHs 312 carry the control information generated in layer one of the OSI model. Control information comprises: pilot bits 300 used in channel estimation, feedback information (FBI) 308 transmit power-control commands (TPC) 302, and optionally a transport format combination indicator (TFCI) 304. The TFCI 304 tells the receiver the transport
25 formats of different transport channels, i.e. Transport Format Combination, used in the current frame.

As can be seen from Figure 3, the down-link DPDCHs 310 and DPCCHs 312 are time multiplexed into the same slot 330C. In the up-link the channels are sent in parallel so that they are IQ/code multiplexed (I = in-
30 phase, Q = quadrature) into each frame 340C.

The channels in the radio interface Uu are processed according to a protocol architecture comprising, according to the ISO (International Standardization Organization) OSI (Open Systems Interconnection) model, three protocol layers: a physical layer (= layer one), a data link layer (= layer two), and a network layer (= layer three). The protocol stacks are located both in the radio network subsystem RNS and in the user equipment UE. Each unit (e.g. user equipment, or radio network subsystem) has a layer which is in logical communication with a layer of another unit. Only the lowest, physical layers communicate with each other directly. The other layers always use the services offered by the next, lower layer. The message must thus physically pass in the vertical direction between the layers, and only in the lowermost layer the message passes horizontally between the layers. Figure 7A illustrates the layers of the protocol architecture. The ovals between different sub-layers indicate service access points (SAP).

The physical layer L1 offers different transport channels to the MAC sub-layer MAC and higher layers. The physical layer transport services are described by how and with what characteristics data is transferred over the radio interface. The transport channels include a Paging Channel PCH, Broadcast Channel BCH, Synchronization Channel SCH, Random Access Channel RACH, Forward Access Channel FACH, Down-link Shared Channel DSCH, Fast Up-link Signaling Channel FAUSCH, and Dedicated Channel DCH. The physical layer L1 maps transport channels with physical channels. In the FDD (Frequency Division Duplex) mode a physical channel is characterized by the code, frequency and, in the up-link, the relative phase (I/Q). In the TDD (Time Division Duplex) mode the physical channel is also characterized by the time slot.

The transport channels may be divided into common channels (where there is a need for in-band identification of the UEs when particular UEs are addressed) and dedicated channels (where the UEs are identified by the physical channel, i.e. code and frequency for the FDD and code, time slot and frequency for the TDD).

The common transport channel types are as follows. The RACH is a contention based up-link channel used for transmission of a relatively small amount of data, for example of initial access or non-real-time dedicated control or traffic data. The FACH is a common down-link channel without closed-loop power control used for transmission of a relatively small amount of

data. The DSCH is a down-link channel shared by several UEs carrying dedicated control or traffic data. The BCH is a down-link channel used for broadcasting system information to an entire cell. The SCH is a down-link channel used for broadcasting synchronization information to an entire cell in the TDD mode. The PCH is a down-link channel used for broadcasting control information to an entire cell allowing efficient UE sleep mode procedures.

The dedicated transport channel types, in turn, are as follows. The DCH is a channel dedicated to one UE used in up-link or down-link. The FAUSCH is an up-link channel used to allocate dedicated channels in conjunction with the FACH. The data link layer is divided into two sub-layers: a MAC sub-layer (Medium Access Control) and a RLC sub-layer (Radio Link Control). The MAC sub-layer L2/MAC offers different logical channels to the RLC sub-layer L2/RLC. The logical channel is characterized by the type of information that is transferred. The logical channels include a Paging Control Channel PCCH, Broadcast Control Channel BCCH, Synchronization Control Channel SCCH, Common Control Channel, Dedicated Control Channel DCCH and Dedicated Traffic Channel DTCH.

The control channels are used for transfer of control plane information only. The SCCH is a down-link channel for broadcasting synchronization information in case of TDD (Time Division Duplex) operation. The BCCH is a down-link channel for broadcasting system control information. The PCCH is a down-link channel that transfers paging information. The CCCH is a bi-directional channel for transmitting control information between the network and the UEs. This channel is commonly used by the UEs having no RRC connection with the network. The DCCH is a point-to-point bi-directional channel that transmits dedicated control information between the UE and the network. This channel is established through an RRC connection setup procedure.

The traffic channels are used for the transfer of user plane information only. The DTCH is a point-to-point channel, dedicated to one UE, for the transfer of user information. A DTCH can exist in both up-link and down-link.

The MAC layer maps logical channels with transport channels. One of the functions of the MAC sub-layer is to select the appropriate transport format for each transport channel depending on the momentary source bit rate.

Figure 7C illustrates mapping between logical channels and transport channels. An SCCH is connected to an SCH. A BCCH is connected to a BCH. A PCCH is connected to a PCH. A CCCH is connected to a RACH and a FACH. A DTCH can be connected to either a RACH and a FACH, to a RACH and a DSCH, to a DCH and a DSCH, or to a DCH. A DCCH can be connected to either a RACH and a FACH, to a RACH and a DSCH, to a DCH and a DSCH, to a DCH, or to a FAUSCH.

The third layer L3 has a RRC sub-layer (Radio Resource Control) that handles the control plane signaling of layer three between the user equipment and the network. Among the functions carried out by the RRC sub-layer are assignment, reconfiguration and release of radio resources for the RRC connection. So the RRC sub-layer handles the assignment of the radio resources required for the RRC connection, including the requirements of both the control and the user plane. The RRC layer may reconfigure radio resources during an established RRC connection.

In the present invention we are interested in the encryption of the different services' data flows of one user. According to the known techniques, all data flows would be encrypted using the same ciphering mask.

The method according to the invention for ciphering data transmission in a radio system is presented in Figure 6. The performance of the method begins in block 600.

In block 602 a ciphering key is generated according to a known technique, for example as described in the Background of the Invention section.

In block 604A a ciphering mask is produced in a ciphering algorithm using the ciphering key as an input parameter. Also a logical channel specific parameter or a transport channel specific parameter is used as an additional input parameter to the ciphering algorithm. The logical channel specific parameter can be one of the following: a Radio Access Bearer Identifier, a Logical Channel Identifier, a Signaling Link Identifier, or some other parameter identifying the logical channel used. The transport channel specific parameter can be, for example, the Dedicated Channel Identifier, or some other parameter identifying the transport channel used.

The term 'bearer' is a high-level name for transmission of information used in connection with a network service. Depending on the services, information in the UMTS can usually be transmitted using one or

more bearers. The services include, for example, speech transmission, data services and video service. A radio bearer, on the other hand, represents that part of the bearer which extends over the air interface. One logical channel normally carries one radio bearer. A logical channel defines the service offered by the MAC layer. A logical channel can be mapped to different types of transport channels depending on the existing service mode (either to a dedicated transport channel or common transport channels). The transport channels define the services offered by the physical layer. It is also possible to multiplex several logical channels into one transport channel in the MAC layer. The transport channels are further mapped to physical channels in the physical layer. Several transport channels can be multiplexed into one physical channel by layer 1. It is also possible that after transport channel multiplexing the data stream is divided between several physical channels.

The invention can thus be applied to a radio system whose terminals can communicate with other transceivers using one or more parallel radio bearers. Typically, when a call is established between a terminal and a network, a physical channel is first established for a Signaling Radio Bearer SRB between the terminal and the radio network subsystem, and once this channel has been established, the actual traffic bearer(s) can be established. The SRB can also be called a signaling link.

The direction of transmission (up-link / down-link) can be used as an additional input parameter to the ciphering algorithm.

Yet another parameter exists: a radio frame specific parameter can be used as an additional input parameter to the ciphering algorithm. The radio frame specific parameter can be, for example, the User Equipment Frame Number (UEFN), or some other parameter identifying the used radio frame. The radio frame specific parameter depends on the protocol layer where the ciphering function is implemented. If it is implemented in the protocol layer that is terminated in the UE and the CN, then a mechanism for conveying the used frame number to the receiving entity has to be defined. If the ciphering function is located in the MAC layer or layer 1 (or some other layer terminated in the UE and the node B or the RNC), a frame number at least partly consisting of the physical frame number can be used, which means that the used frame number need not be signaled with the data.

In block 606 ciphered data is produced by applying the ciphering mask to plain data, using for example the XOR operation as described in Table 1.

5 Next, an elaborated example illustrating the implementation of the ciphering method in the transmitter and in the receiver is explained in connection with Figures 4A, 4B and 4C. Only the relevant points will be illustrated, but it will be clear for a person skilled in the art how ciphering can be performed in various situations for example with different numbers of PDUs.

10 Figure 4A describes a block diagram defining the basic ciphering environment defined in this invention. Generating means 408 are used for generating a ciphering key 410 according to a known technique. Connected with the generating means 408 there is a ciphering algorithm 400 for producing ciphering masks 412A, 412B, 412C. The ciphering algorithm uses
15 the generated ciphering key 410 as an input parameter. The ciphering algorithm 400 uses a logical channel specific parameter 402A as an additional input parameter.

In the receiver end, the logical channel specific parameter needed for deciphering can be read from an unciphered MAC header, for example
20 from the C/T-field of the MAC header. The structure of the MAC PDU is illustrated in Figure 8. The MAC PDU consists of an optional MAC header 800 and a MAC Service Data Unit (MAC SDU) 802. Both the MAC header and the MAC SDU are of variable size. The content and the size of the MAC header 800 depend on the type of the logical channel, and in some cases none of the
25 parameters in the MAC header 800 are needed. The size of the MAC-SDU 802 depends on the size of the RLC PDU, which is defined during the set-up procedure. The MAC header 800 comprises a C/T-field 804. This option allows efficient MAC multiplexing of different logical channels (or different instances of the same logical channel type) into one transport channel, both into
30 dedicated transport channels and common transport channels. When this method is used, the MAC header is not ciphered, which allows separating the different MAC PDUs in the receiver end and which in the common channel mode allows reading the RNTI (Radio Network Temporary Identity) field that is needed for routing messages to the correct entity in the UTRAN.

35 Connected with the ciphering algorithm 400 there are ciphering means 416A, 416B, 416C for producing ciphered data 418A, 418B, 418C by

applying the ciphering mask 412A, 412B, 412C to the plain data 414A, 414B, 414C. As can be seen from Figure 4A, the plain data includes Radio Link Control Layer Protocol Data Units from at least two parallel logical channels, and for each logical channel an individual ciphering mask is produced. So in
5 Figure 4A the ciphering masks 412A, 412B and 412C are all different from each other.

In block 420 the ciphered RLC-PDUs are processed through the MAC layer and mapped into one Transport Block Set, i.e. MAC PDU Set.

Another possible solution is one in which the plain data includes
10 one Radio Link Control Layer Protocol Data Unit 414A from only one logical channel, and for said logical channel an individual ciphering mask 412A is produced. So the invention also works for the individual logical channel.

Normally a new ciphering mask is produced for each radio frame of the physical layer of the protocol stack. If interleaving is used, then a new
15 ciphering mask can be produced for each interleaving period of the physical layer of the protocol stack. Typically one interleaving period consists of several radio frames.

The left-hand side of Figure 4A represents the operations carried out in the transmitter. The corresponding operations will also be carried out in
20 the receiver, as illustrated on the right-hand side of Figure 4A. The only differences are that block 422 is used to derive RLC-PDUs out of the received Transport Block Set, and that the deciphering means 424A, 424B, 424C are used to decipher the received data.

In one embodiment of the invention, a Radio Link Control Layer
25 Protocol Data Unit of at least one logical channel is already ciphered, and the step of producing ciphered data is not repeated for said already ciphered Radio Link Control Layer Protocol Data Unit. It is thus avoided that the data would be ciphered twice. Of course, if for example such end-to-end ciphering is used, the data can be ciphered twice: first by the application using the
30 service, and then by the MAC layer according to the invention. This will cause no loss of transmission capacity, as the XOR operation does not add any extra bits, even if it is performed twice.

Figure 4B illustrates a solution to a situation where the plain data includes at least two successive Radio Link Control Layer Protocol Data Units
35 of one logical channel. If we assume, for example, that the first RLC PDU 414A and the second RLC PDU 414B are from one logical channel, then the

problem can be solved in such a way that only one ciphering mask 412A is produced for these PDUs 414A, 414B. Different parts of this ciphering mask 412A are then used for ciphering the first PDU 414A and the second PDU 414B. The length of the required ciphering mask 412A in this case is naturally
5 the sum of the lengths of the first and the second PDU 414A, 414B. Because the PDUs 414A, 414B are from the same logical channel (same Radio Access Bearer), the maximum length required can be calculated as being two times the maximum RLC PDU size of that bearer.

Figure 4C illustrates a situation where the plain data includes one
10 Transport Block Set (TBS) including Medium Access Control Layer Protocol Data Units of at least two different logical channels, and for each Transport Block Set one ciphering mask 412 is used in producing the ciphered data. In this option, the basic unit to be ciphered is a Transport Block Set. This defines the required length of the ciphering mask 412 produced by the algorithm 400.
15 Layer 1 still adds Transport Block specific CRCs (Cyclic Redundancy Check), but because the XOR operation does not change the length of data, it should be possible to cipher the whole TBS as one unit. The length of each transport block in the TBS has to be told to L1 anyway. This option has the disadvantage that the MAC header is also ciphered, and so the MAC PDUs
20 cannot be routed anywhere on the network side before the TBS is deciphered. This is a problem if common channels over lur are possible. The length of the required ciphering mask 412 is equal to the maximum Transport Block Set size for the transport channel in question.

Another possible solution is one in which the plain data includes
25 one Transport Block Set including a Medium Access Control Layer Protocol Data Unit of one logical channel, and for each Transport Block Set one ciphering mask is used in producing the ciphered data.

The solution of the invention is implemented in the radio system preferably by software, whereby the invention requires certain functions in the
30 protocol processing software located in the transmitter and in the receiver, especially in blocks 204A, 204B and 226A, 226B of Figure 2A. Thus the generating means 408, the ciphering algorithm 400, and the ciphering means 416A, 416B, 416C can be software modules of the protocol stack residing in the user equipment UE and in the radio network subsystem RNS. The solution
35 can also be implemented with hardware, for example using ASIC (Application Specific Integrated Circuit) or discrete components.

The method of the invention can be implemented, for example, in the Medium Access Control Layer of the protocol stack. This is illustrated in Figure 7B, which shows a high-level overview of the MAC layer depicted in Figure 7A with ciphering functions included. C1() and C2() are two alternatives for the location of ciphering. C1(0), C1(1), C1(2) and C1(3) refer to the use of logical channel specific ciphering parameters as explained above with reference to Figures 4A and 4B, whereas C2(00), C2(01) and C2(02) refer to the use of transport channel specific ciphering parameters. Some MAC functions may be needed below C2(00), C2(01) and C2(02) blocks, but for the sake of clarity they are not illustrated here. Basically the RLC PDUs come to the MAC layer from each logical channel. In the MAC layer the RLC-PDUs are then mapped to the MAC PDUs in the functional blocks 700, 702, 704, which include the operations for the PCH, BCH, SCH, Dedicated Channel and Common Channel operations. Normally one RLC PDU is mapped to one MAC PDU (= Transport Block). This mapping realizes the mapping from a logical channel to a transport channel. The mapping rules have been explained above in connection with Figure 7C. If ciphering is used for the CCCH then a ciphering block, for example C1(4), should be in Figure 7B in the line between the 'CCCH' and the functional block 704.

Even though the invention is described above with reference to an example shown in the attached drawings, it is apparent that the invention is not restricted to it, but can vary in many ways within the inventive idea disclosed in the attached claims.

CLAIMS

1. A method of ciphering data transmission in a radio system, comprising:

(602) generating a ciphering key;

5 (604A) producing a ciphering mask in a ciphering algorithm using the ciphering key as an input parameter;

(606) producing ciphered data by applying the ciphering mask to plain data;

characterized by:

10 (604B) using a logical channel specific parameter or a transport channel specific parameter as an additional input parameter to the ciphering algorithm.

2. The method as claimed in claim 1, **characterized** by using the direction of transmission as an additional input parameter to the ciphering algorithm.

3. The method as claimed in claim 1, **characterized** in that the logical channel specific parameter is one of the following: a Radio Access Bearer Identifier, a Logical Channel Identifier, a Signaling Link Identifier.

20 4. The method as claimed in claim 1, **characterized** in that the transport channel specific parameter is a Dedicated Channel Identifier.

5. The method as claimed in claim 1, **characterized** by using a radio frame specific parameter as an additional input parameter to the ciphering algorithm.

25 6. The method as claimed in claim 5, **characterized** in that the radio frame specific parameter is a User Equipment Frame Number.

7. The method as claimed in claim 1, **characterized** in that the plain data includes Radio Link Control Layer Protocol Data Units from at least two parallel logical channels, and for each logical channel an individual ciphering mask is produced.

30 8. The method as claimed in claim 7, **characterized** in that a Radio Link Control Layer Protocol Data Unit of at least one logical channel is already ciphered, and the step of producing ciphered data is not repeated for said already ciphered Radio Link Control Layer Protocol Data Unit.

35 9. The method as claimed in claim 1, **characterized** in that the plain data includes one Radio Link Control Layer Protocol Data Unit from

one logical channel, and for said logical channel an individual ciphering mask is produced.

10. The method as claimed in claim 1, **characterized** in that the plain data includes at least two successive Radio Link Control Layer Protocol Data Units of one logical channel, and for each Radio Link Control Layer Protocol Data Unit a different part of the ciphering mask is used in producing the ciphered data.

11. The method as claimed in claim 1, **characterized** in that the plain data includes one Transport Block Set including Medium Access Control Layer Protocol Data Units of at least two different logical channels, and for each Transport Block Set one ciphering mask is used in producing the ciphered data.

12. The method as claimed in claim 1, **characterized** in that the plain data includes one Transport Block Set including a Medium Access Control Layer Protocol Data Unit of one logical channel, and for each Transport Block Set one ciphering mask is used in producing the ciphered data.

13. The method as claimed in claim 1, **characterized** in that the ciphering is performed in the Medium Access Control Layer of a protocol stack.

14. The method as claimed in claim 1, **characterized** in that a new ciphering mask is produced for each radio frame of the physical layer of the protocol stack.

15. The method as claimed in claim 1, **characterized** in that a new ciphering mask is produced for each interleaving period of the physical layer of the protocol stack.

16. A user equipment (UE), comprising:
generating means (408) for generating a ciphering key (410);
a ciphering algorithm (400) connected with the generating means (408) for producing a ciphering mask (412A, 412B, 412C) using the ciphering key (410) as an input parameter;

ciphering means (416A, 416B, 416C) connected with the ciphering algorithm (400) for producing ciphered data (418A, 418B, 418C) by applying the ciphering mask (412A, 412B, 412C) to plain data (414A, 414B, 414C);

characterized in that:

the ciphering algorithm (400) uses a logical channel specific parameter (402A) or a transport channel specific parameter (402B) as an additional input parameter.

5 17. The user equipment as claimed in claim 16, **characterized** in that the ciphering algorithm (400) uses the direction of transmission as an additional input parameter.

10 18. The user equipment as claimed in claim 16, **characterized** in that the logical channel specific parameter (402A) is one of the following: a Radio Access Bearer Identifier, a Logical Channel Identifier, a Signaling Link Identifier.

19. The user equipment as claimed in claim 16, **characterized** in that the transport channel specific parameter (402B) is a Dedicated Channel Identifier.

15 20. The user equipment as claimed in claim 16, **characterized** in that the ciphering algorithm (400) uses a radio frame specific parameter (404) as an additional input parameter.

21. The user equipment as claimed in claim 20, **characterized** in that the radio frame specific parameter (404) is a User Equipment Frame Number.

20 22. The user equipment as claimed in claim 16, **characterized** in that the ciphering means (416A, 416B, 416C) accept plain data (414A, 414B, 414C) including Radio Link Control Layer Protocol Data Units from at least two parallel logical channels, and the ciphering algorithm (400) produces for each logical channel an individual ciphering mask (412A, 412B, 25 412C), and the ciphering means (416A, 416B, 416C) use for each logical channel the ciphering mask (412A, 412B, 412C) of said channel.

23. The user equipment as claimed in claim 22, **characterized** in that a Radio Link Control Layer Protocol Data Unit (414C) of at least one logical channel is already ciphered, and the ciphering means (416C) 30 do not cipher said already ciphered Radio Link Control Layer Protocol Data Unit (414C).

24. The user equipment as claimed in claim 16, **characterized** in that the ciphering means (416A) accept plain data (414A) including a Radio Link Control Layer Protocol Data Unit from one logical 35 channel, and the ciphering algorithm (400) produces for said logical channel

an individual ciphering mask (412A), and the ciphering means (416A) use for said logical channel the ciphering mask (412A) of said channel.

25. The user equipment as claimed in claim 16, **characterized** in that the ciphering means (426) accept plain data including at least two successive Radio Link Control Layer Protocol Data Units of one logical channel, and the ciphering algorithm (400) produces for said logical channel an individual ciphering mask (412A), and the ciphering means (426) use for each Radio Link Control Layer Protocol Data Unit different part of the ciphering mask (412A).

26. The user equipment as claimed in claim 16, **characterized** in that the ciphering means (434) accept plain data including one Transport Block Set including Medium Access Control Layer Protocol Data Units of at least two different logical channels, and the ciphering algorithm (400) produces for each Transport Block Set an individual ciphering mask (412), and the ciphering means (434) use for each Transport Block Set one ciphering mask (412).

27. The user equipment as claimed in claim 16, **characterized** in that the ciphering means (434) accept plain data including one Transport Block Set including a Medium Access Control Layer Protocol Data Unit of one logical channel, and the ciphering algorithm (400) produces for each Transport Block Set an individual ciphering mask (412), and the ciphering means (434) use for each Transport Block Set one ciphering mask (412).

28. The user equipment as claimed in claim 16, **characterized** in that the generating means (408), the ciphering algorithm (400), and the ciphering means (416A, 416B, 416C) reside in the Medium Access Control Layer of a protocol stack.

29. The user equipment as claimed in claim 16, **characterized** in that the ciphering algorithm (400) produces a new ciphering mask (412A, 412B, 412C) for each radio frame of the physical layer of the protocol stack.

30. The user equipment as claimed in claim 16, **characterized** in that the ciphering algorithm (400) produces a new ciphering mask (412A, 412B, 412C) for each interleaving period of the physical layer of the protocol stack.

31. A radio network subsystem (RNS), comprising:

generating means (408) for generating a ciphering key (410);

a ciphering algorithm (400) connected with the generating means (408) for producing a ciphering mask (412A, 412B, 412C) using the ciphering key (410) as an input parameter;

5 ciphering means (416A, 416B, 416C) connected with the ciphering algorithm (400) for producing ciphered data (418A, 418B, 418C) by applying the ciphering mask (412A, 412B, 412C) to plain data (414A, 414B, 414C);

characterized in that:

10 the ciphering algorithm (400) uses a logical channel specific parameter (402A) or a transport channel specific parameter (402B) as an additional input parameter.

32. The radio network subsystem as claimed in claim 31, **characterized** in that the ciphering algorithm (400) uses the direction of transmission as an additional input parameter.

15 33. The radio network subsystem as claimed in claim 31, **characterized** in that the logical channel specific parameter (402A) is one of the following: a Radio Access Bearer Identifier, a Logical Channel Identifier, a Signaling Link Identifier.

20 34. The radio network subsystem as claimed in claim 31, **characterized** in that the transport channel specific parameter (402B) is a Dedicated Channel Identifier.

35. The radio network subsystem as claimed in claim 31, **characterized** in that the ciphering algorithm (400) uses a radio frame specific parameter (404) as an additional input parameter.

25 36. The radio network subsystem as claimed in claim 35, **characterized** in that the radio frame specific parameter (404) is a User Equipment Frame Number.

30 37. The radio network subsystem as claimed in claim 31, **characterized** in that the ciphering means (416A, 416B, 416C) accept plain data (414A, 414B, 414C) including Radio Link Control Layer Protocol Data Units from at least two parallel logical channels, and the ciphering algorithm (400) produces for each logical channel an individual ciphering mask (412A, 412B, 412C), and the ciphering means (416A, 416B, 416C) use for each logical channel the ciphering mask (412A, 412B, 412C) of
35 said channel.

38. The radio network subsystem as claimed in claim 37, **characterized** in that a Radio Link Control Layer Protocol Data Unit (414C) of at least one logical channel is already ciphered, and the ciphering means (416C) do not cipher said already ciphered Radio Link Control Layer Protocol Data Unit (414C).

39. The radio network subsystem as claimed in claim 31, **characterized** in that the ciphering means (416A) accept plain data (414A) including a Radio Link Control Layer Protocol Data Unit from one logical channel, and the ciphering algorithm (400) produces for said logical channel an individual ciphering mask (412A), and the ciphering means (416A) use for said logical channel the ciphering mask (412A) of said channel.

40. The radio network subsystem as claimed in claim 31, **characterized** in that the ciphering means (426) accept plain data including at least two successive Radio Link Control Layer Protocol Data Units of one logical channel, and the ciphering algorithm (400) produces for said logical channel an individual ciphering mask (412A), and the ciphering means (426) use for each Radio Link Control Layer Protocol Data Unit a different part of the ciphering mask (412A).

41. The radio network subsystem as claimed in claim 31, **characterized** in that the ciphering means (434) accept plain data including one Transport Block Set including Medium Access Control Layer Protocol Data Units of at least two different logical channels, and the ciphering algorithm (400) produces for each Transport Block Set an individual ciphering mask (412), and the ciphering means (434) use for each Transport Block Set one ciphering mask (412).

42. The radio network subsystem as claimed in claim 31, **characterized** in that the ciphering means (434) accept plain data including one Transport Block Set including a Medium Access Control Layer Protocol Data Unit of one logical channel, and the ciphering algorithm (400) produces for each Transport Block Set an individual ciphering mask (412), and the ciphering means (434) use for each Transport Block Set one ciphering mask (412).

43. The radio network subsystem as claimed in claim 31, **characterized** in that the generating means (408), the ciphering algorithm (400), and the ciphering means (416A, 416B, 416C) reside in the Medium Access Control Layer of a protocol stack.

44. The radio network subsystem as claimed in claim 31, **characterized** in that the ciphering algorithm (400) produces a new ciphering mask (412A, 412B, 412C) for each radio frame of the physical layer of the protocol stack.

- 5 45. The radio network subsystem as claimed in claim 31, **characterized** in that the ciphering algorithm (400) produces a new ciphering mask (412A, 412B, 412C) for each interleaving period of the physical layer of the protocol stack.

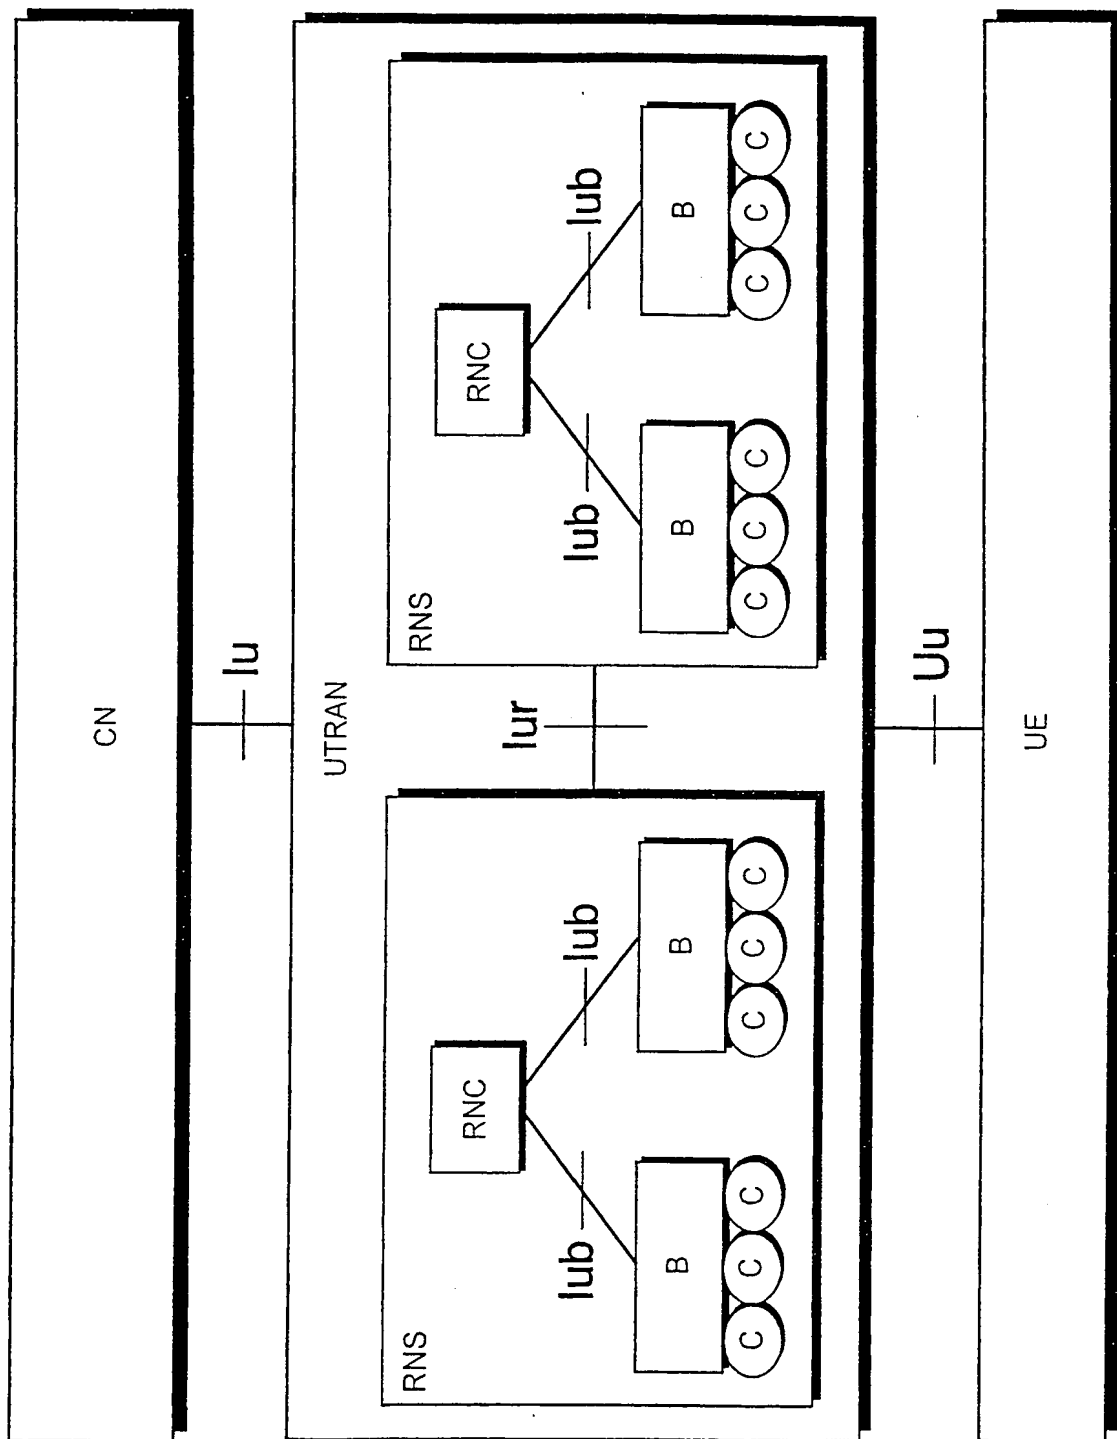


Fig 1A

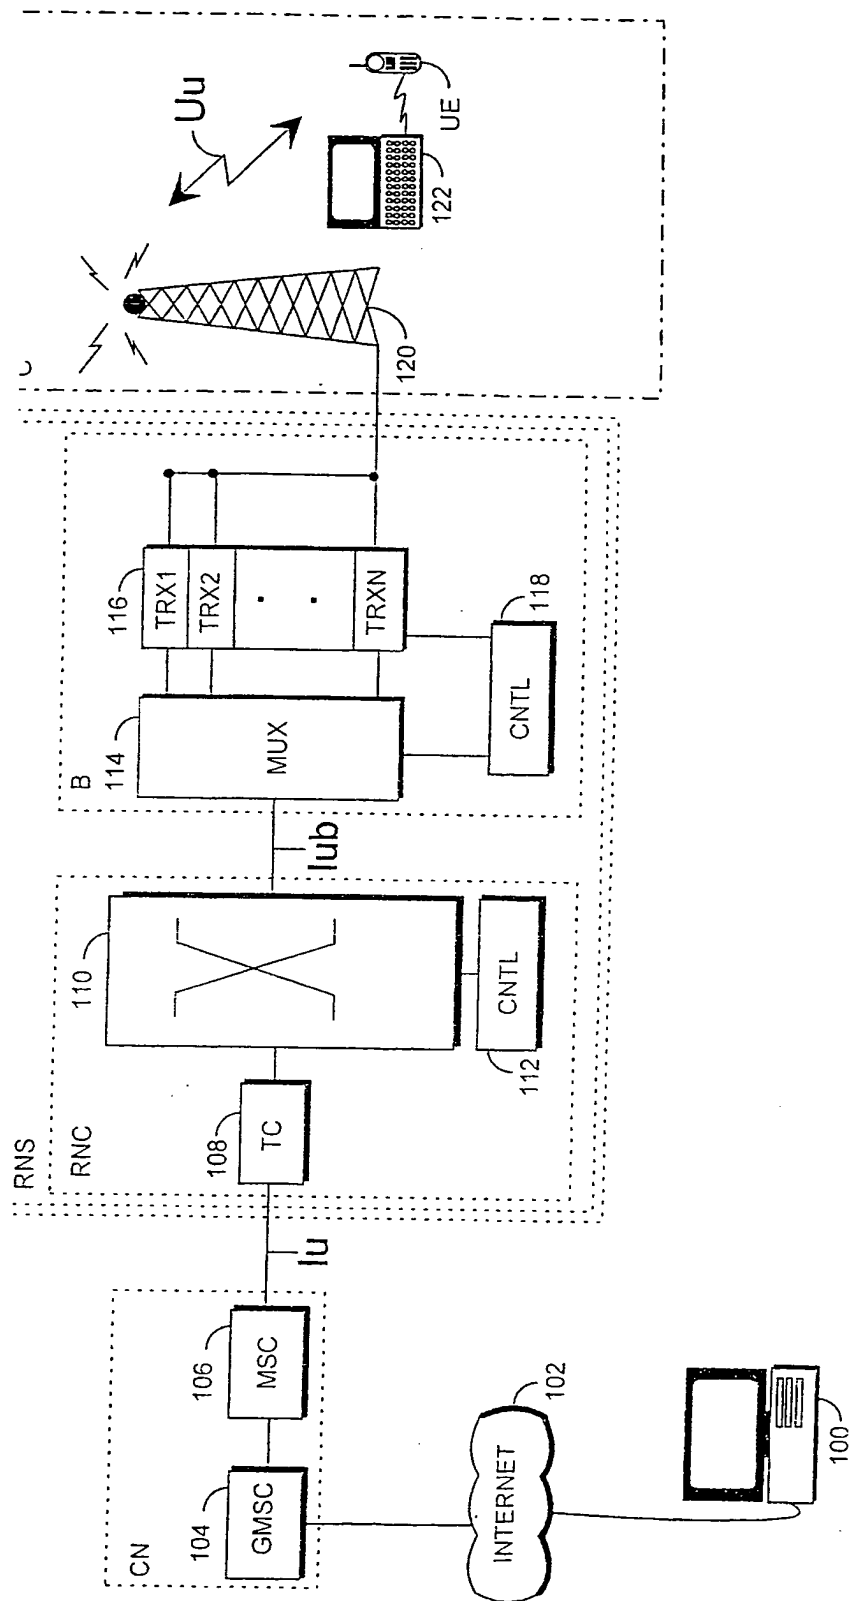


Fig 1B

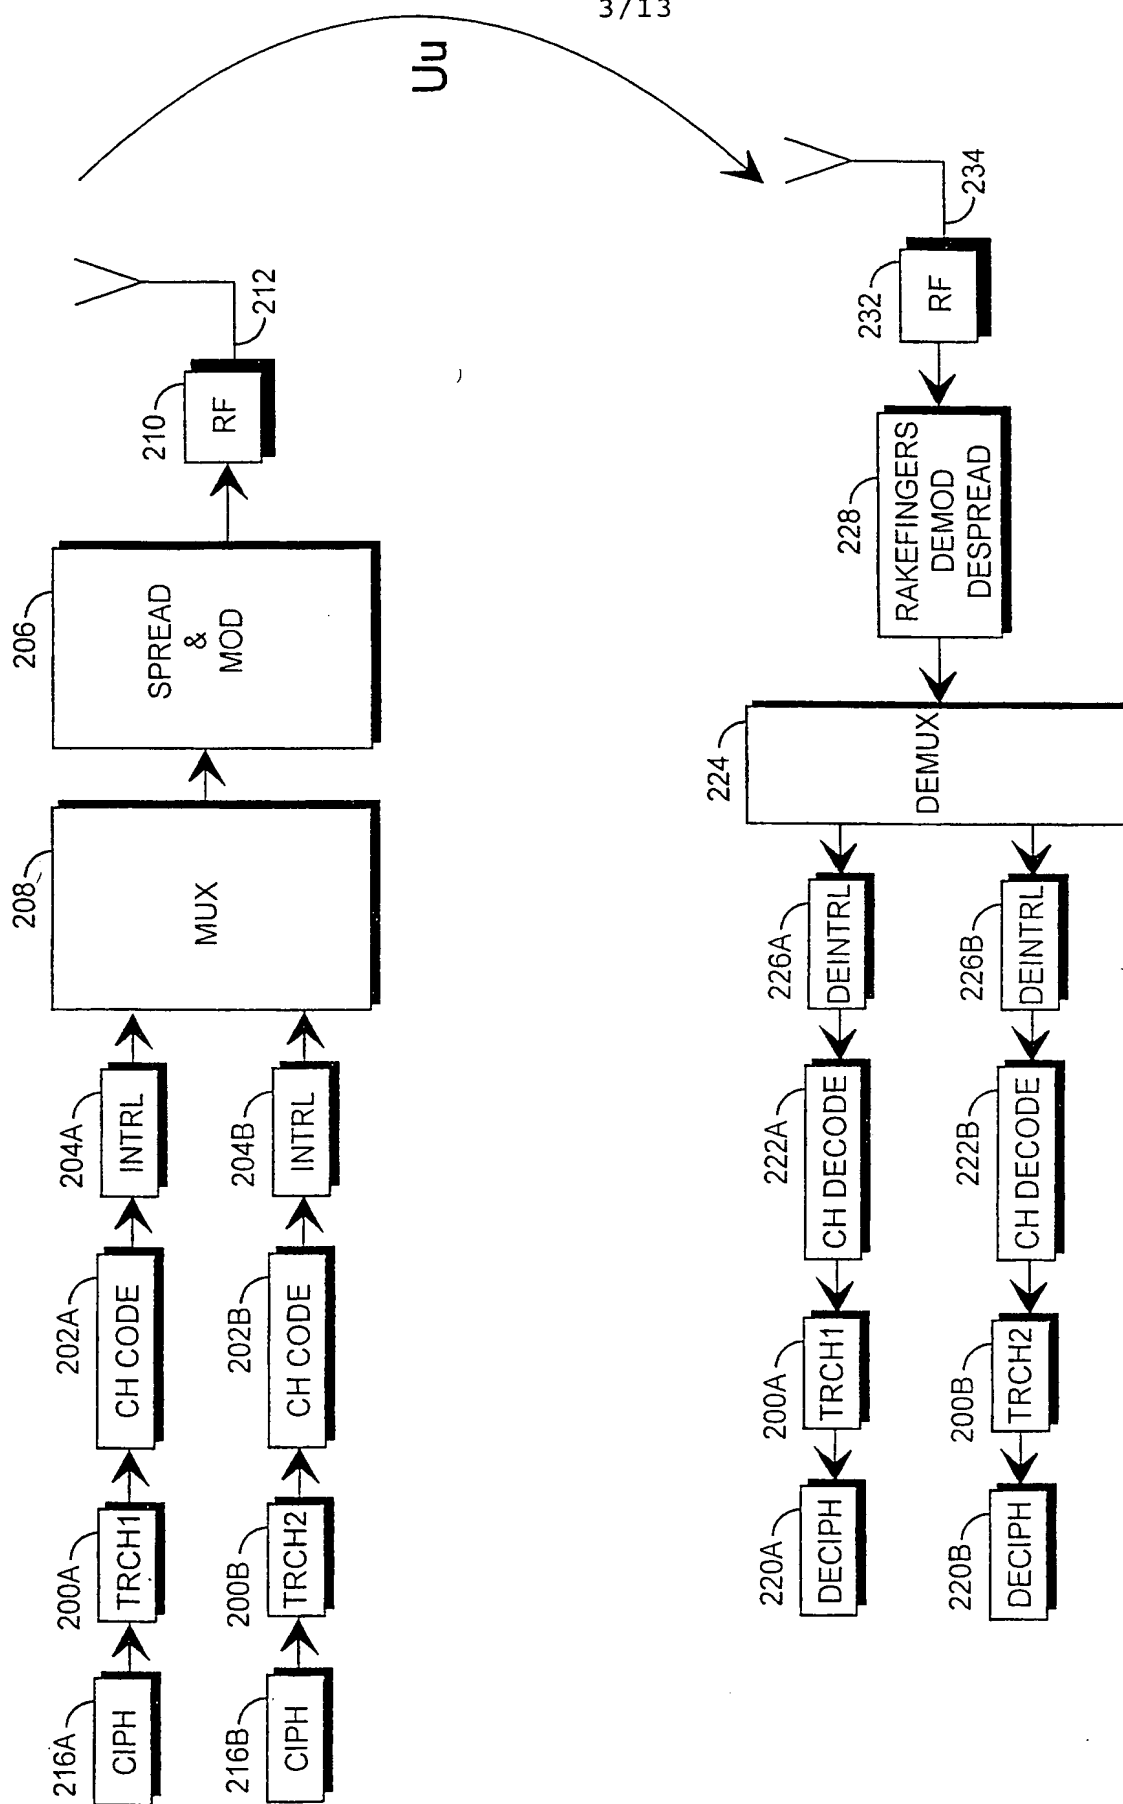


Fig 2A

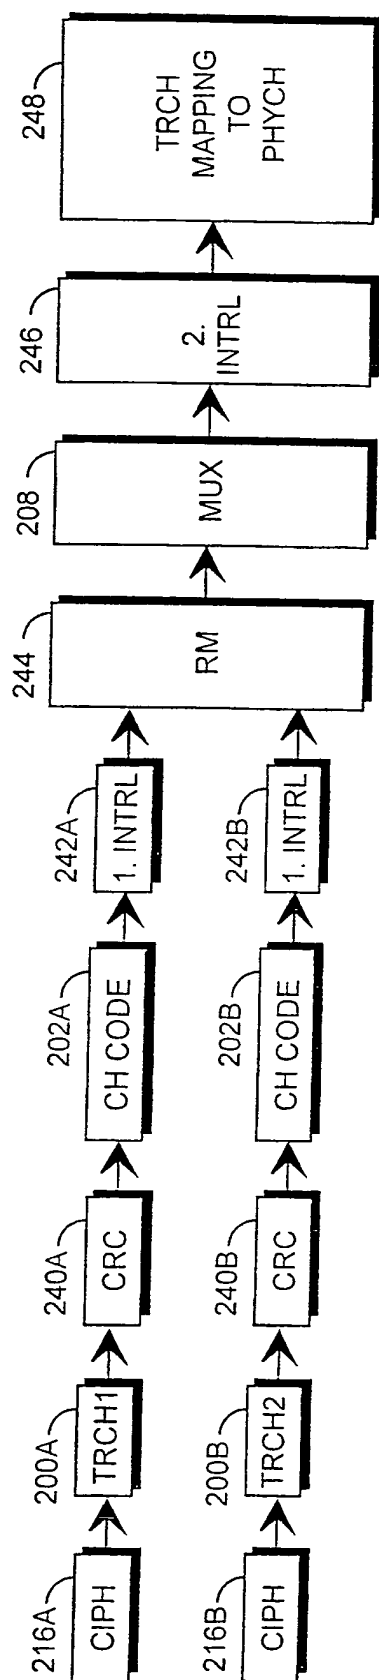


Fig 2B

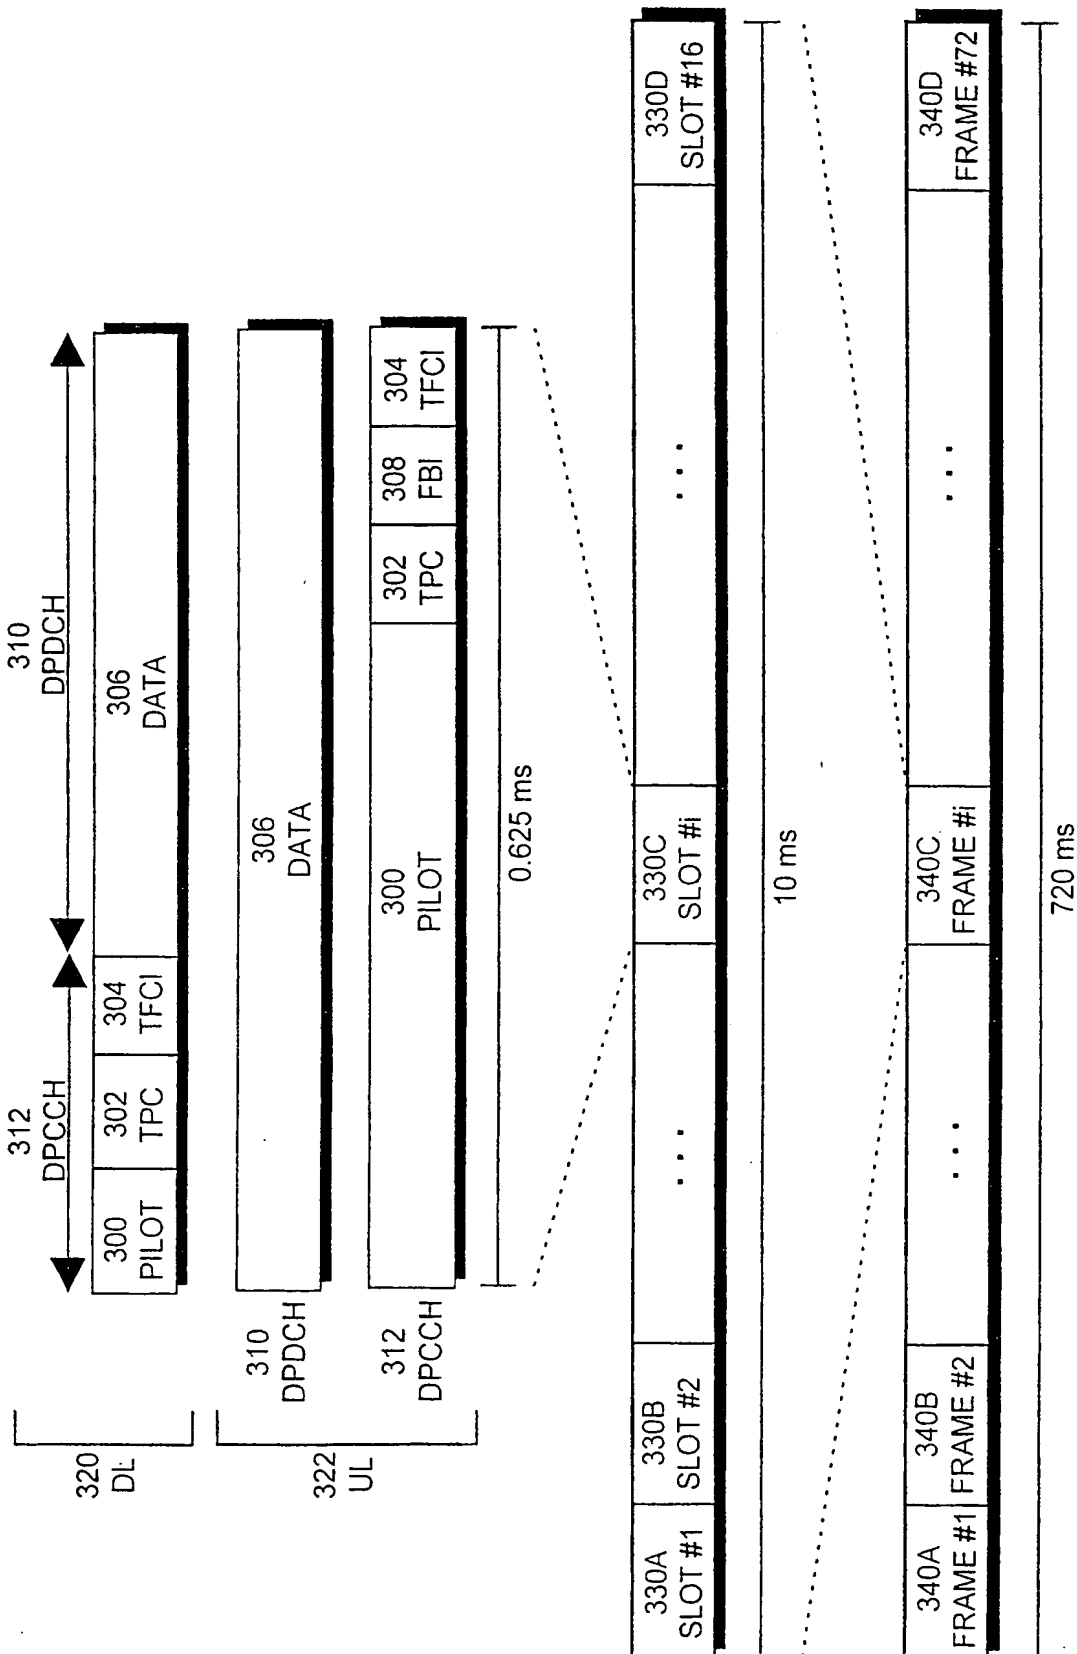


Fig 3

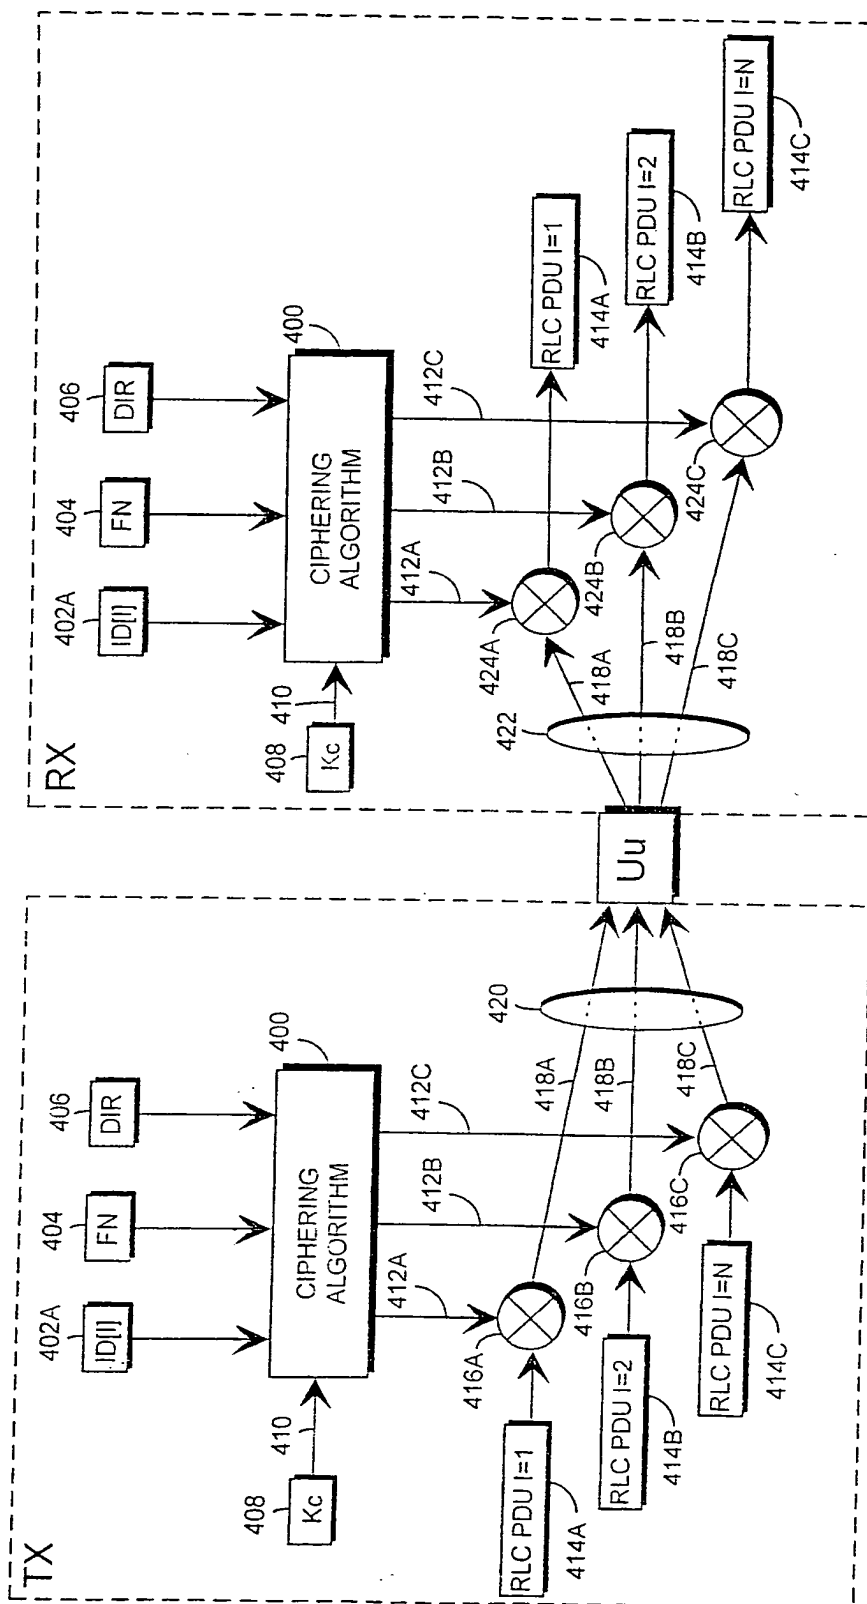


Fig 4A

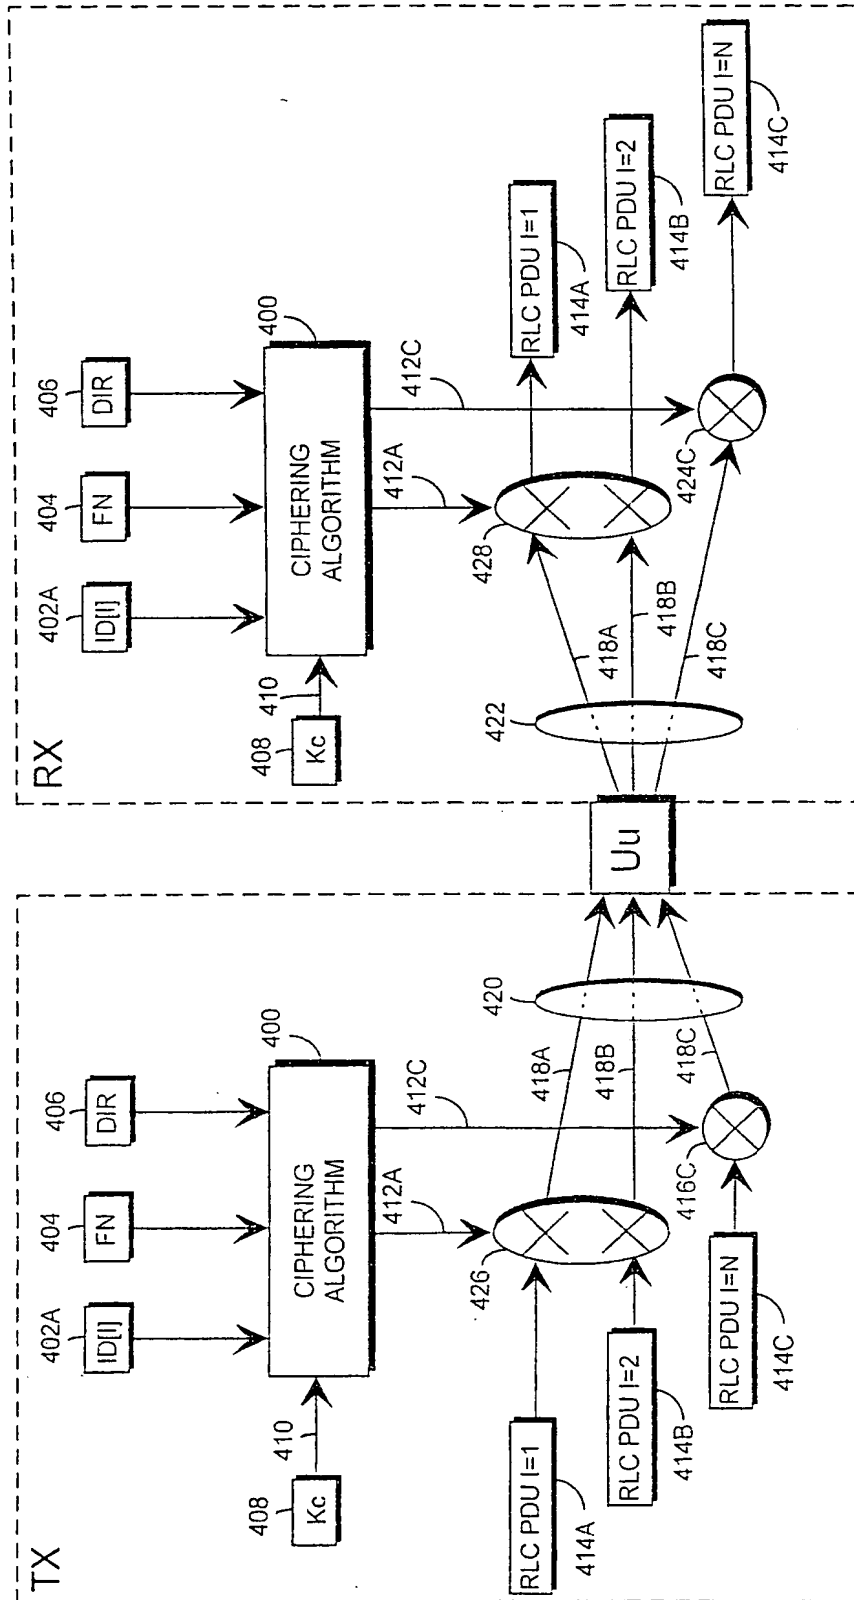


Fig 4B

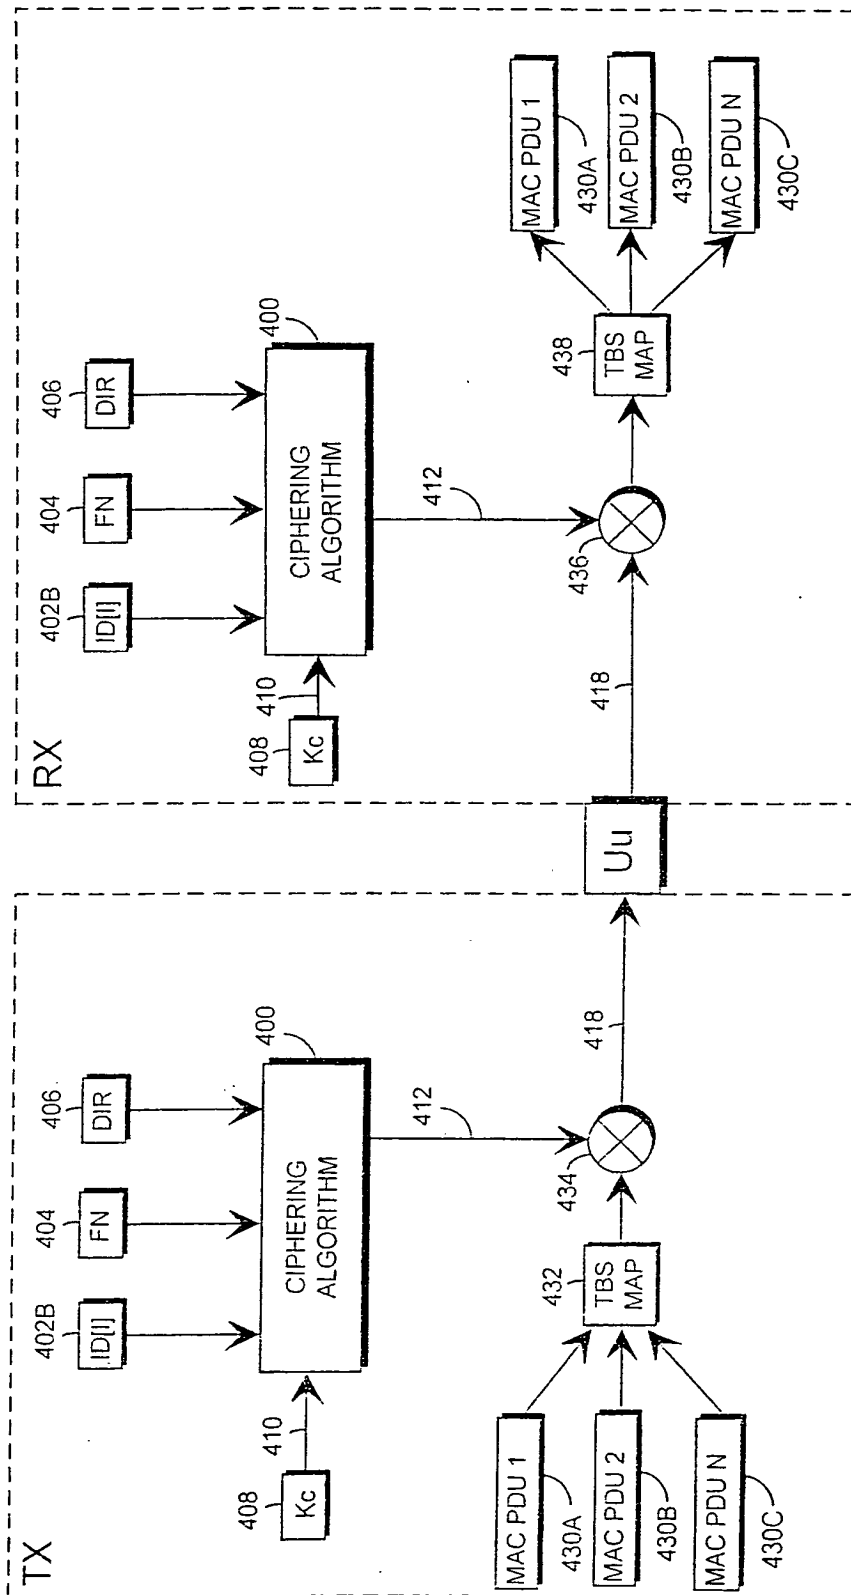


Fig 4C

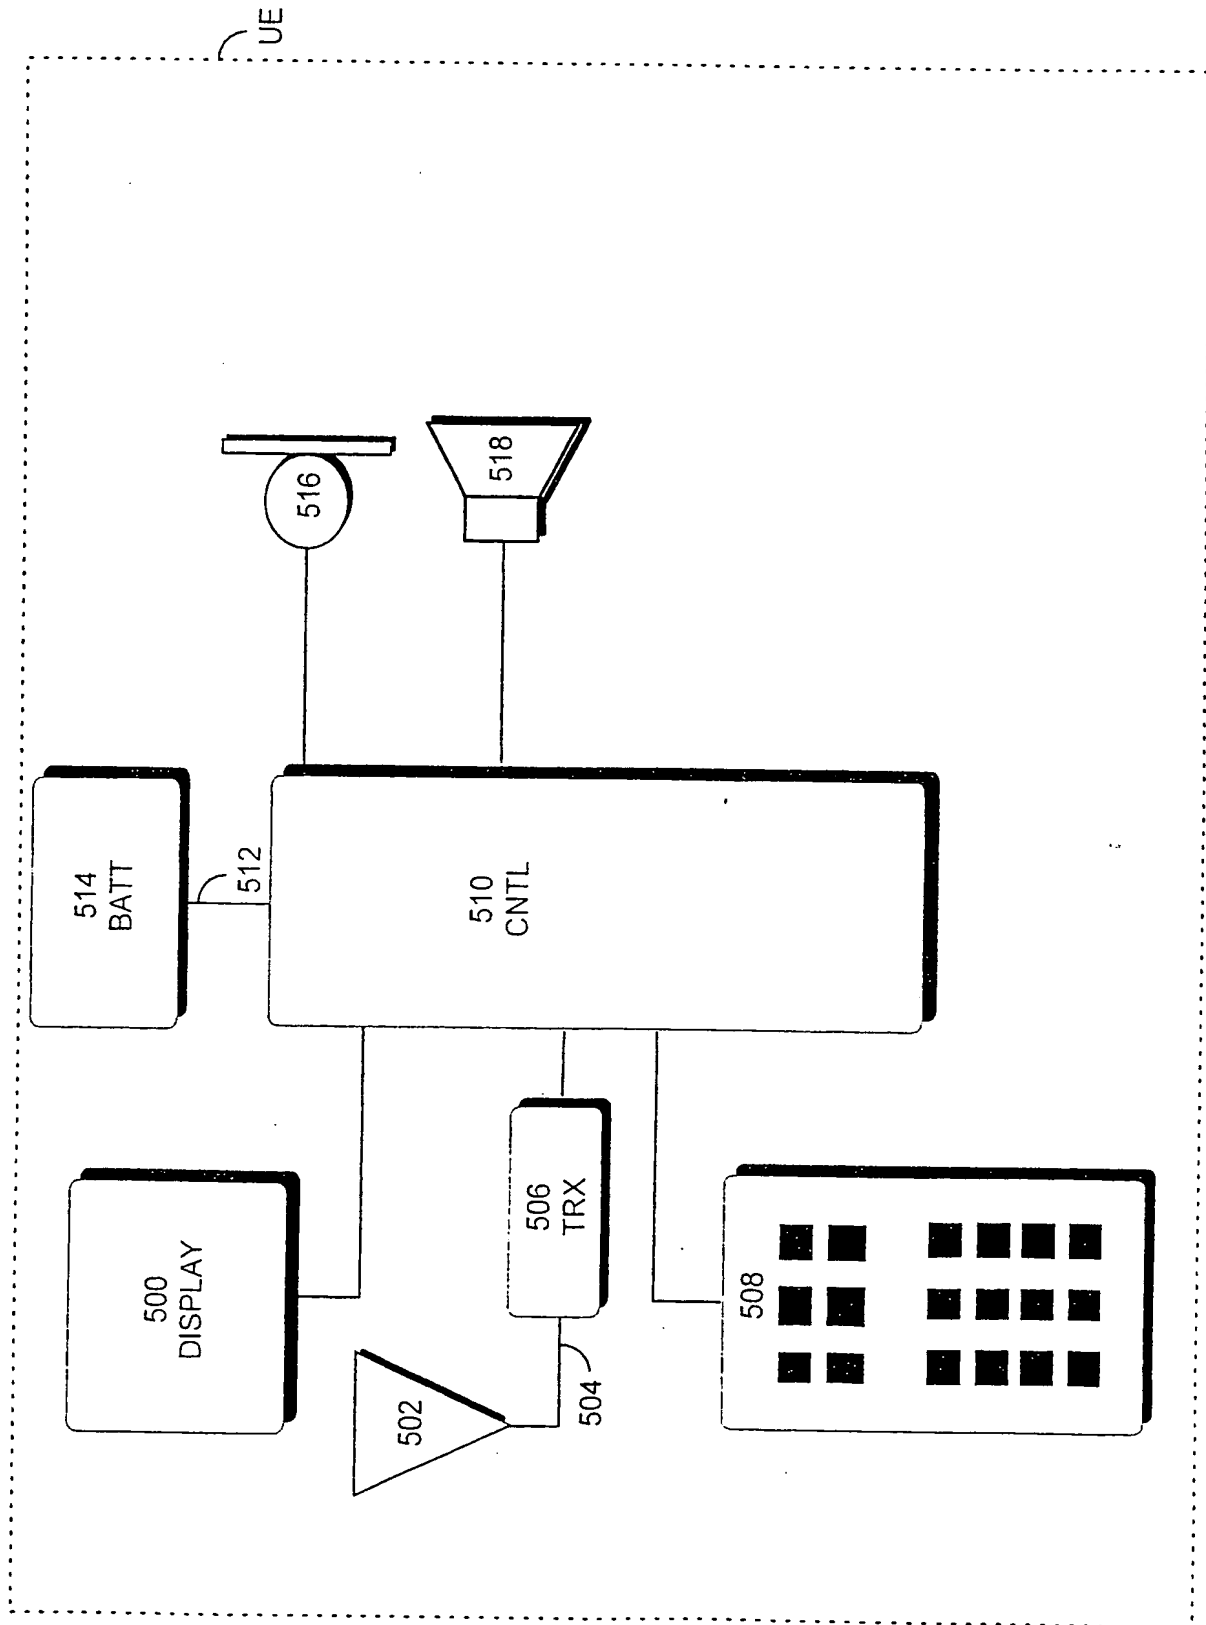


Fig 5

10/13

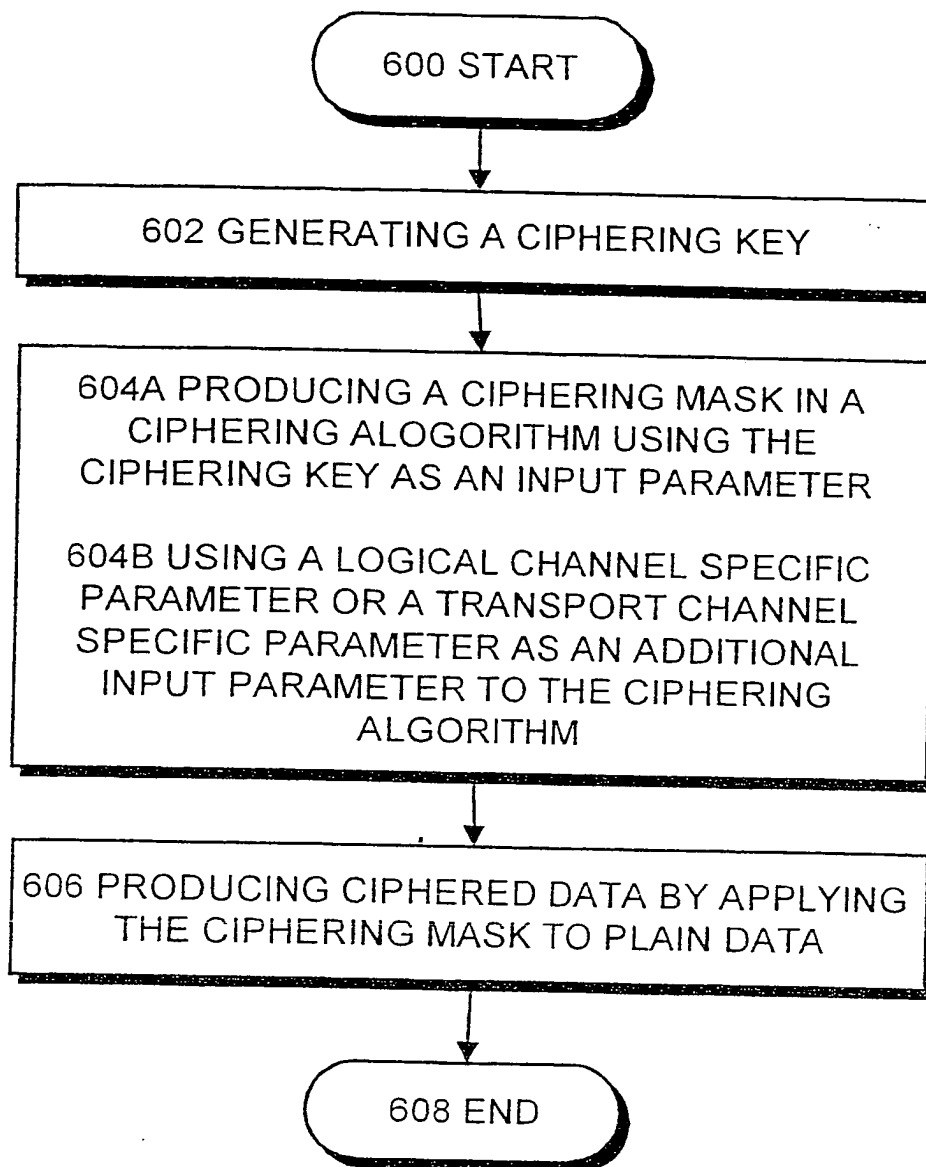


Fig 6

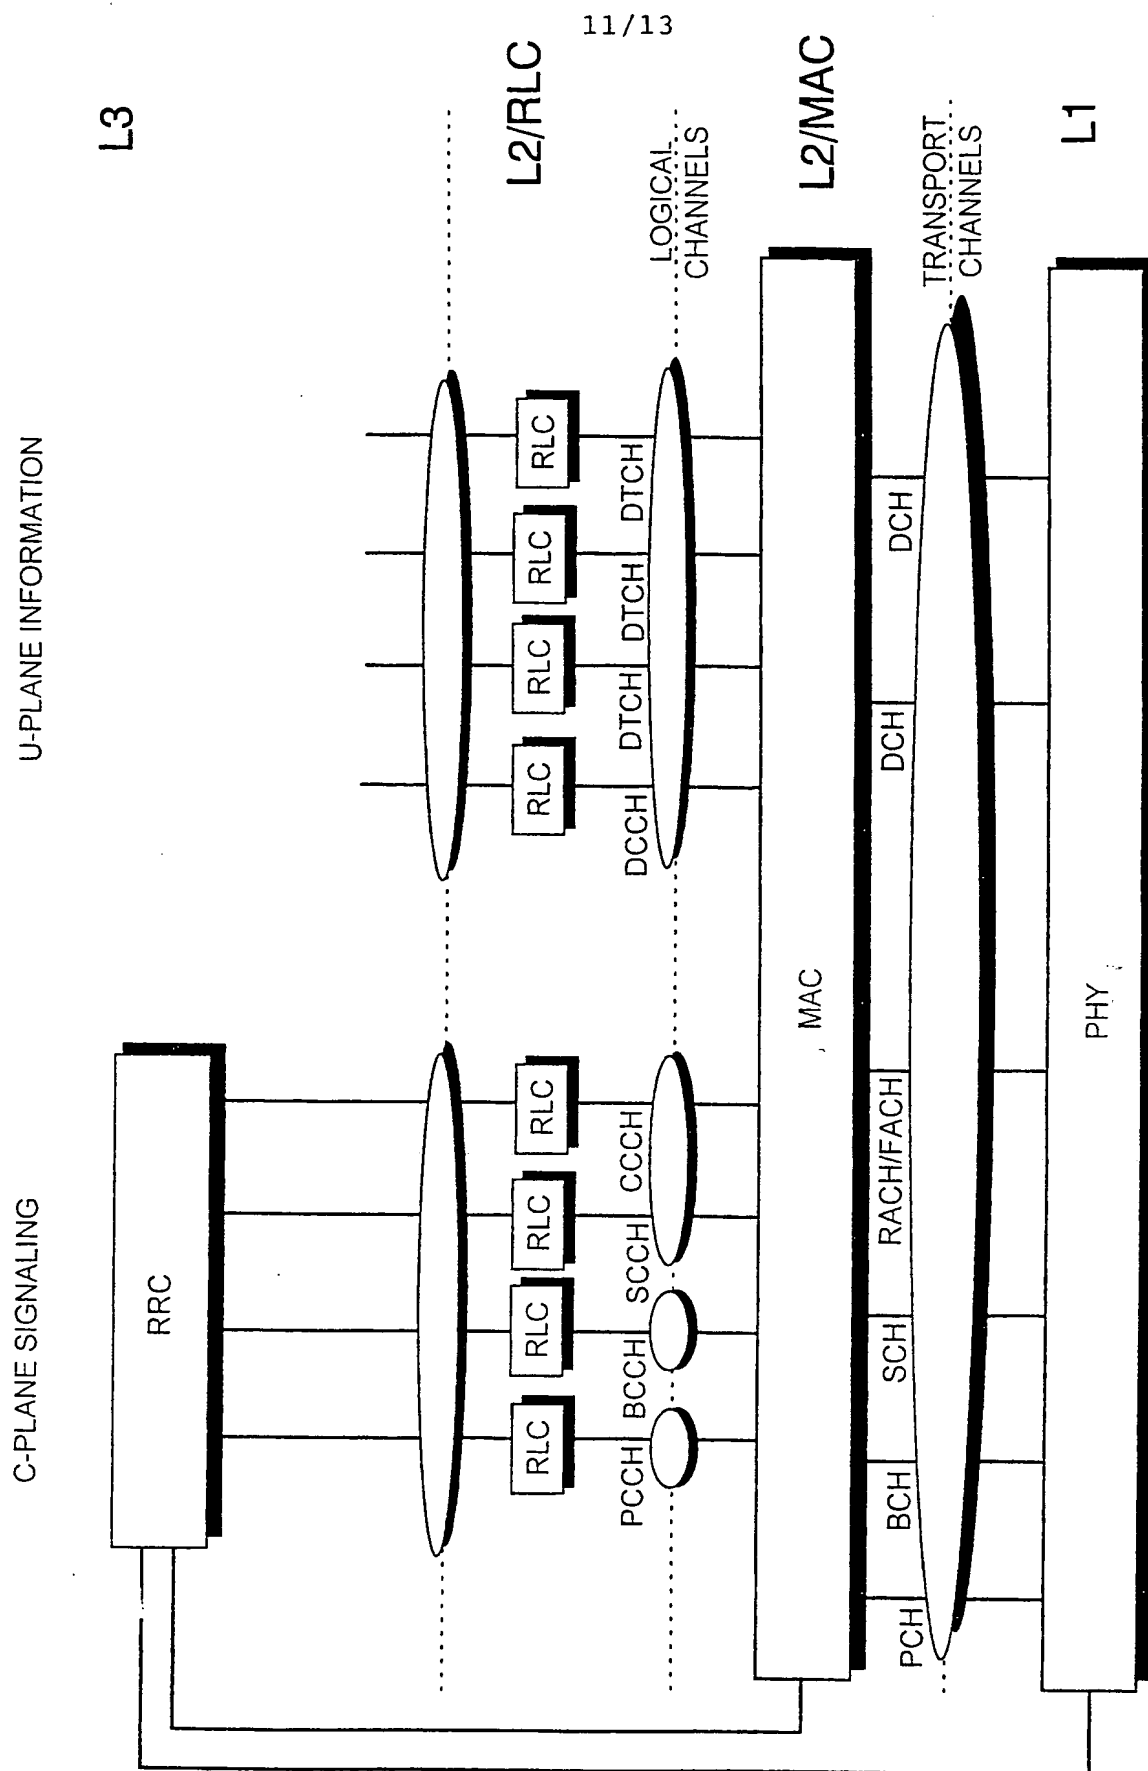


Fig 7A

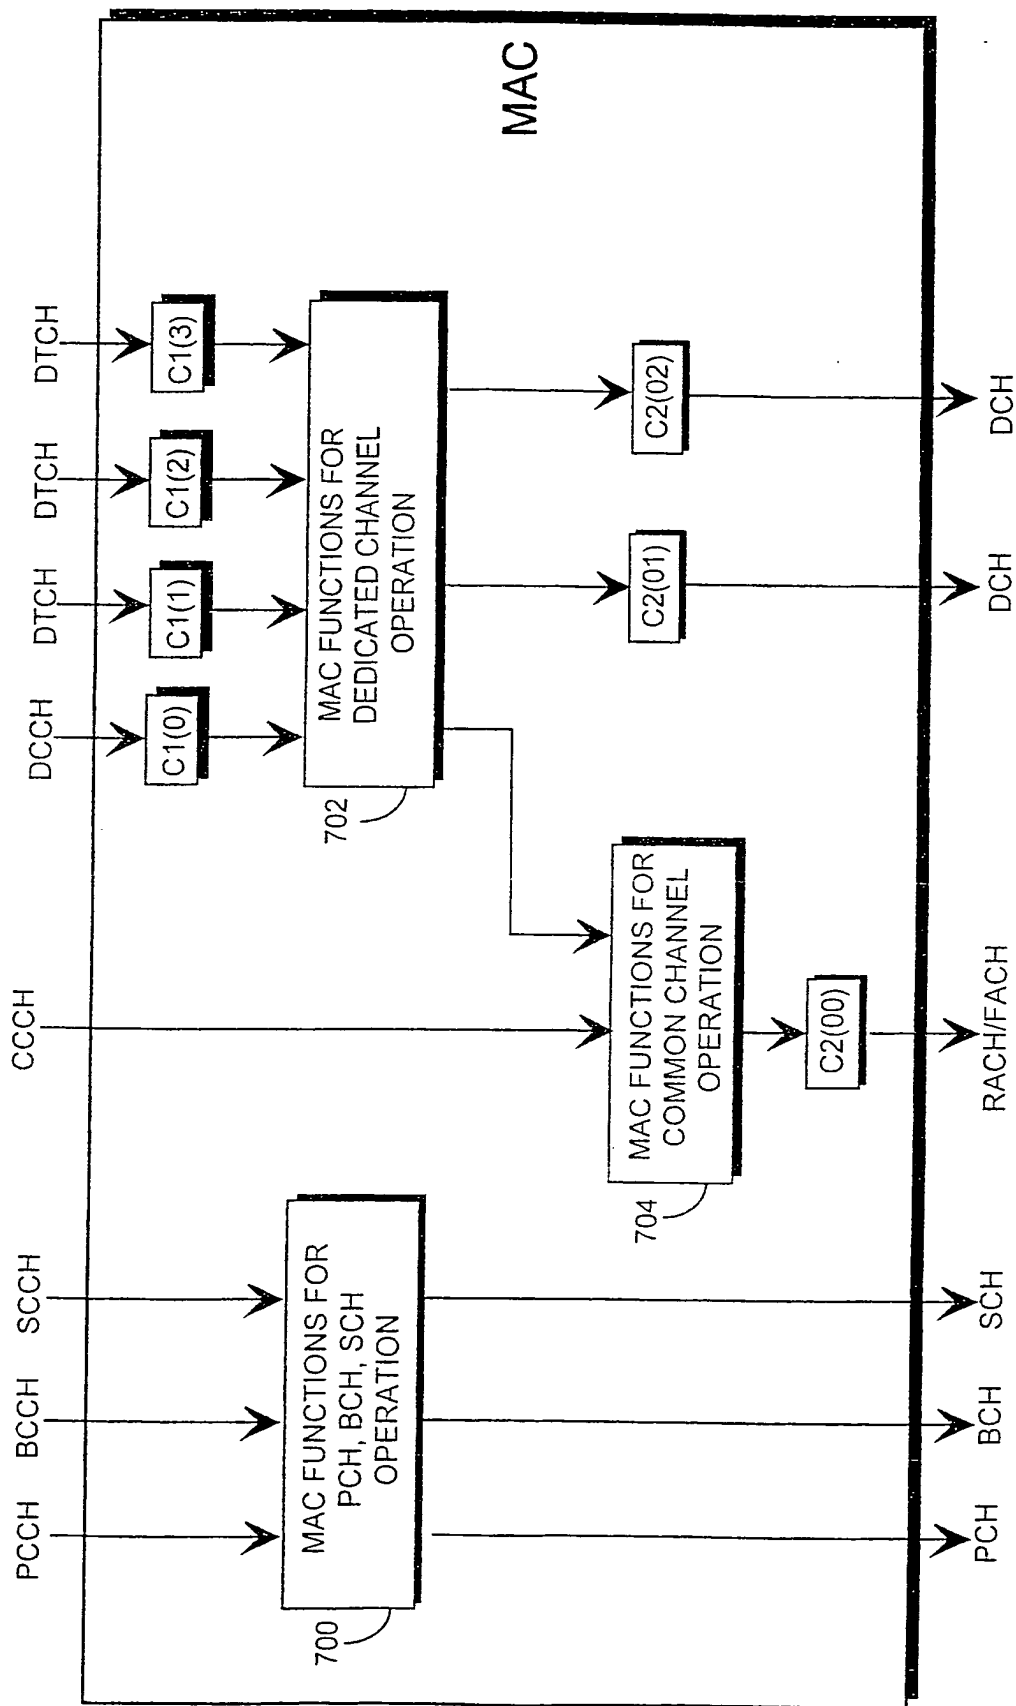


Fig 7B

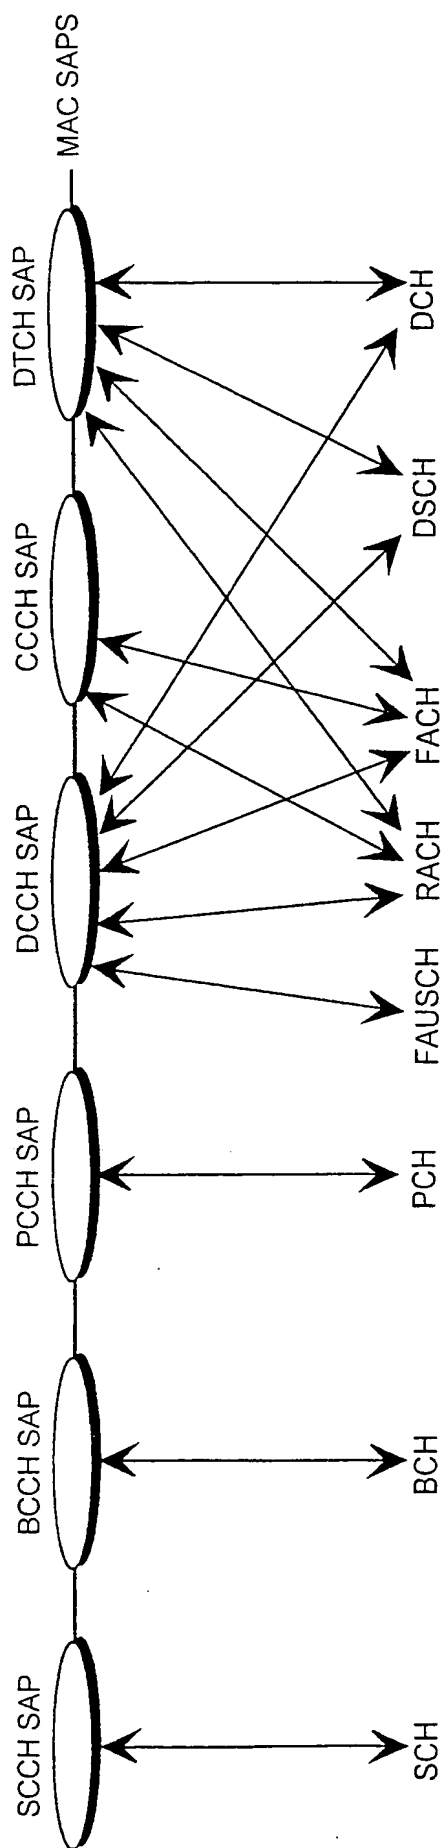


Fig 7C

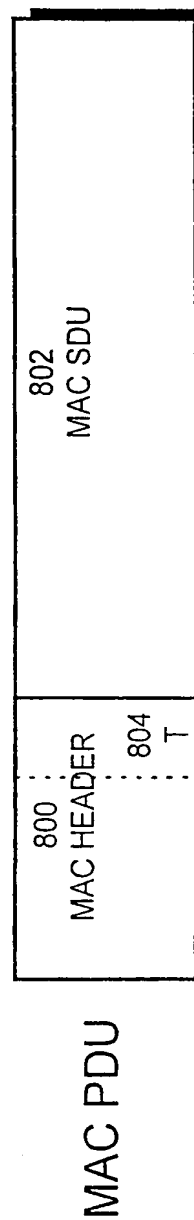


Fig 8

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 00/00177

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04L 9/16

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9712461 A1 (TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)), 3 April 1997 (03.04.97), claim 1	1,16,31
A	--	2-15,17-30, 32-45
A	US 5600722 A (T. YAMAGUCHI ET AL.), 4 February 1997 (04.02.97), see the whole document	1-45
	-- -----	

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

3 August 2000

Date of mailing of the international search report

04 -08- 2000

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Rune Bengtsson/AE

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

02/12/99

International application No.

PCT/FI 00/00177

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9712461 A1	03/04/97	AU 7102196 A	17/04/97
		CA 2233463 A	03/04/97
		CN 1198278 A	04/11/98
		EP 0872078 A	21/10/98
		JP 11511629 T	05/10/99
		NZ 318911 A	29/06/99
		SE 506619 C	19/01/98
		SE 9503343 A	28/03/97
US 5600722 A	04/02/97	JP 7107083 A	21/04/95
		US 5604807 A	18/02/97

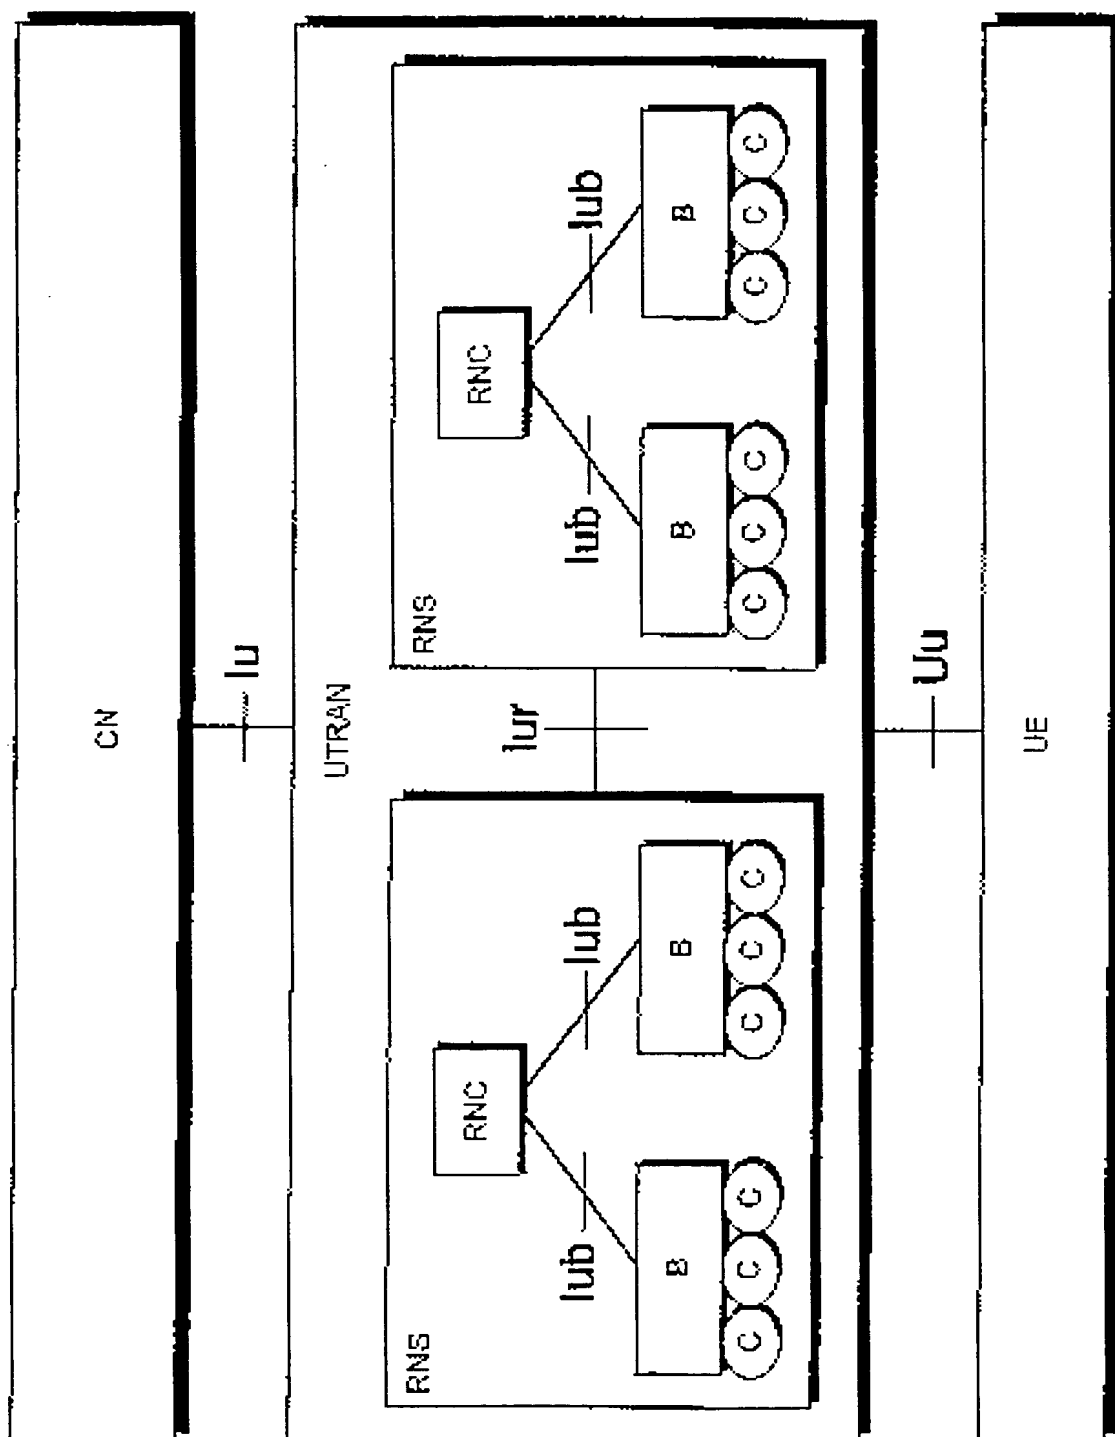


Fig 1A

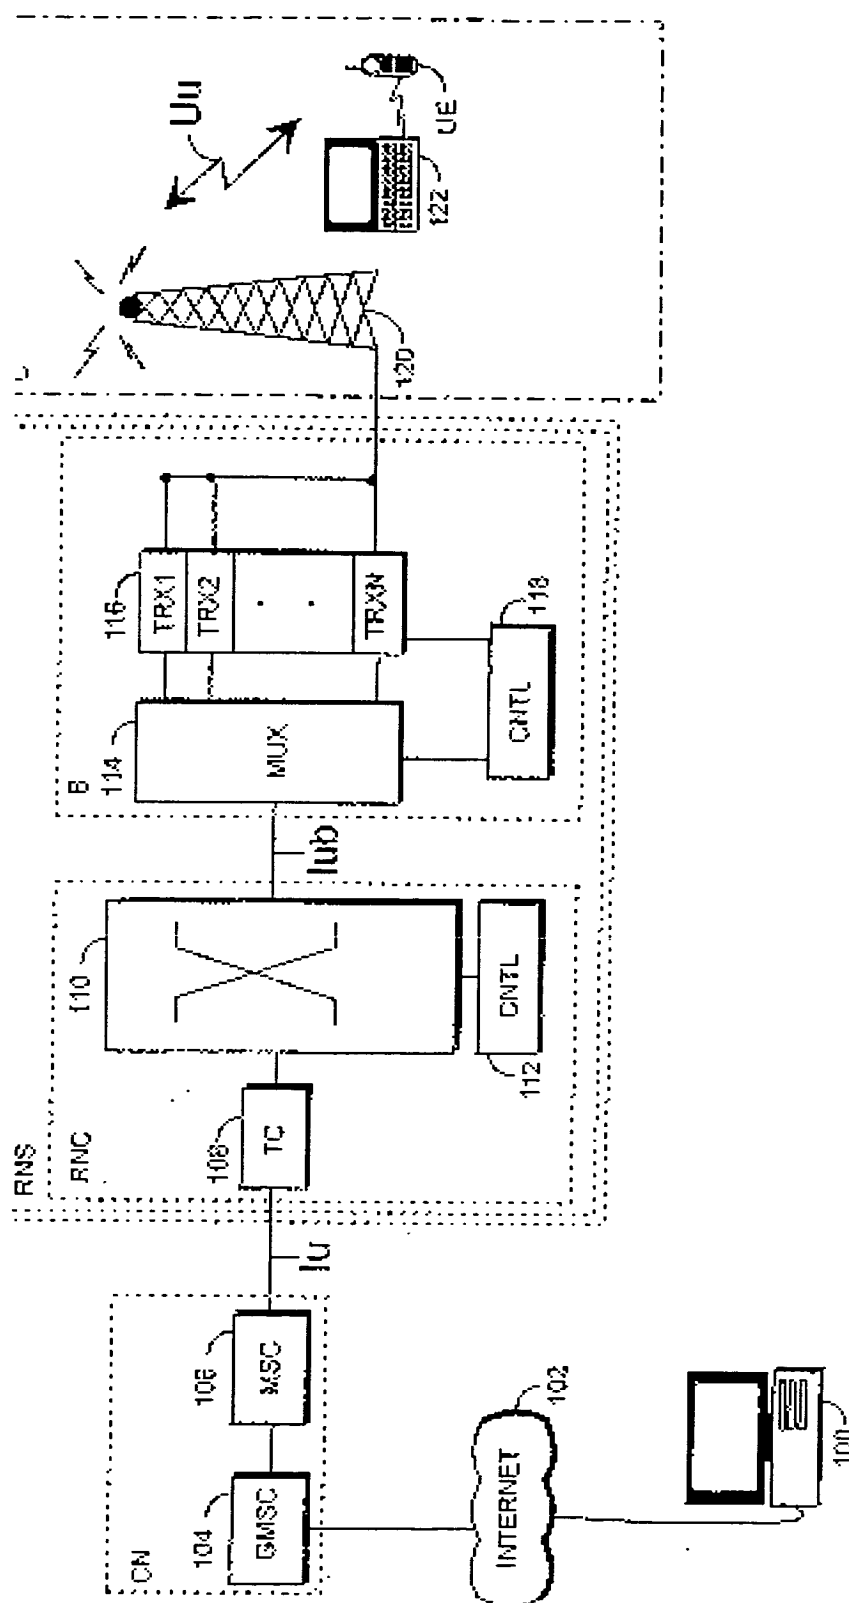


Fig 1B

3/13

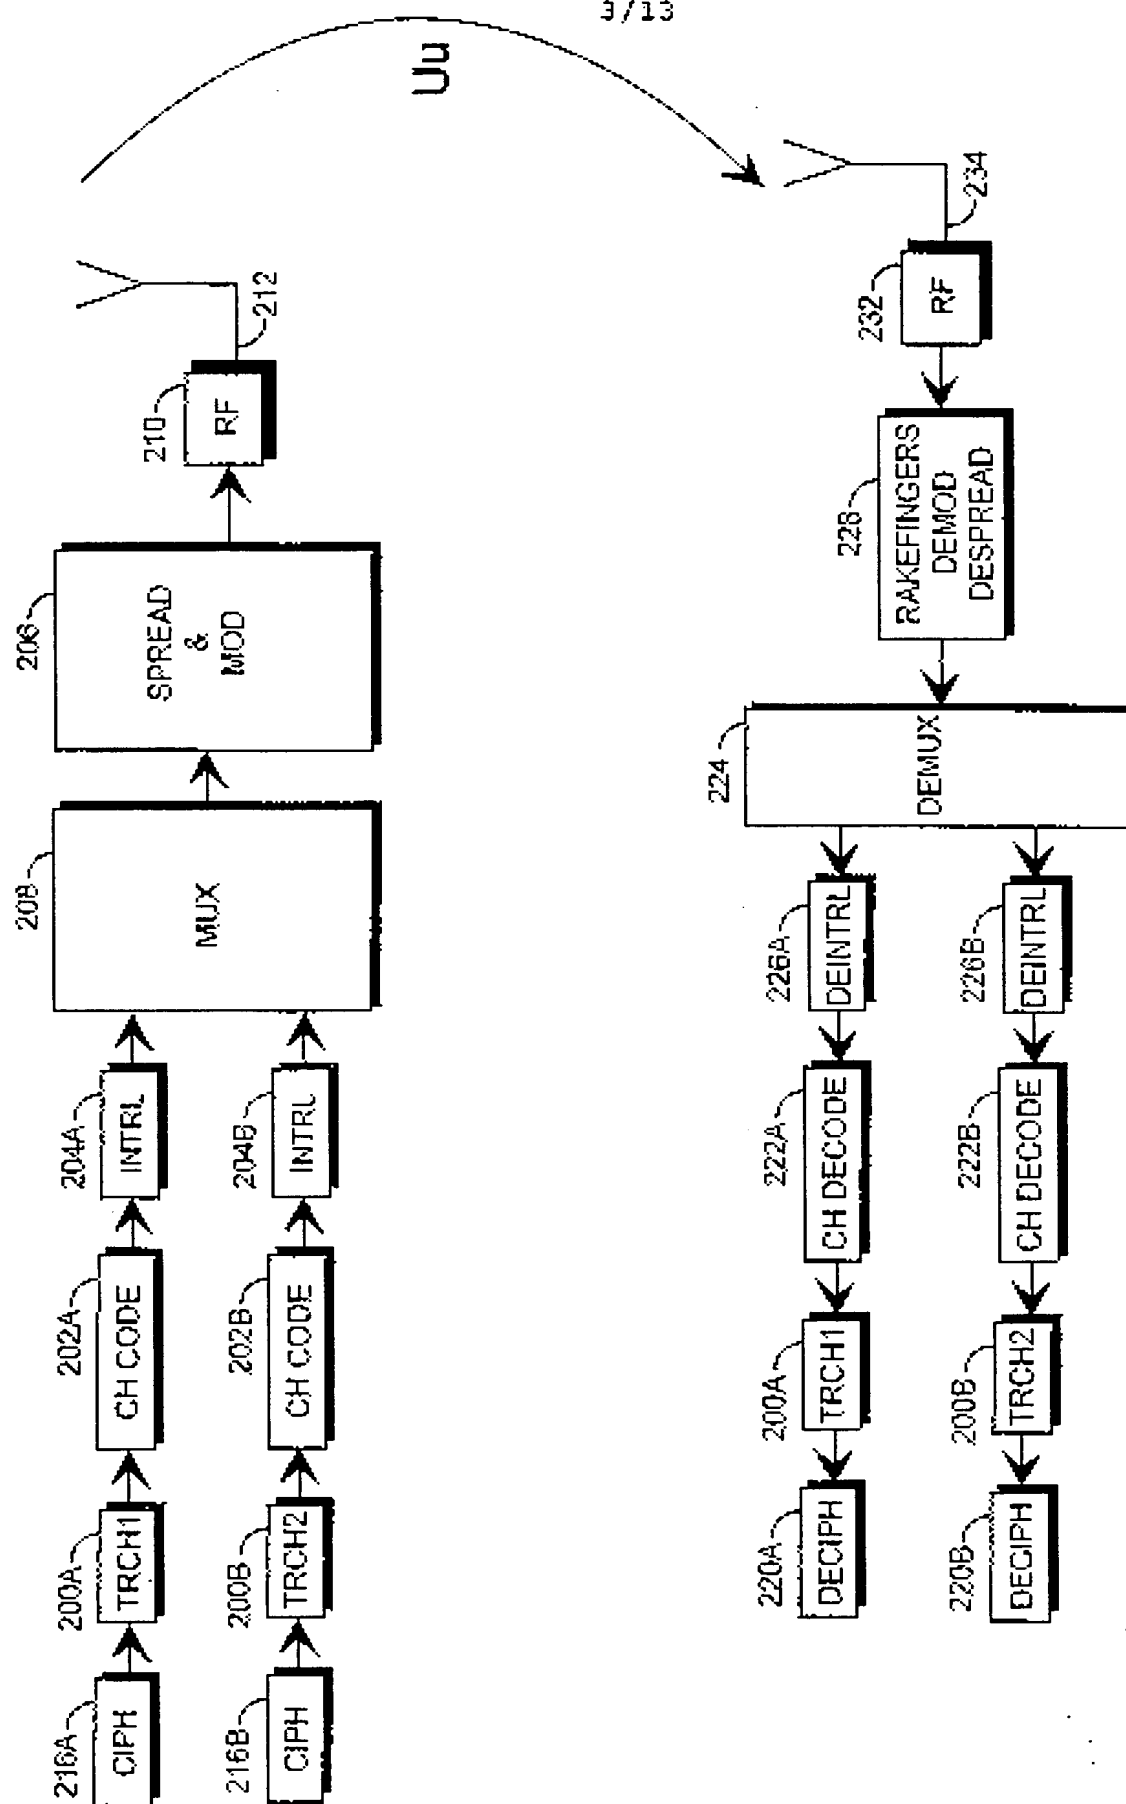


Fig 2A

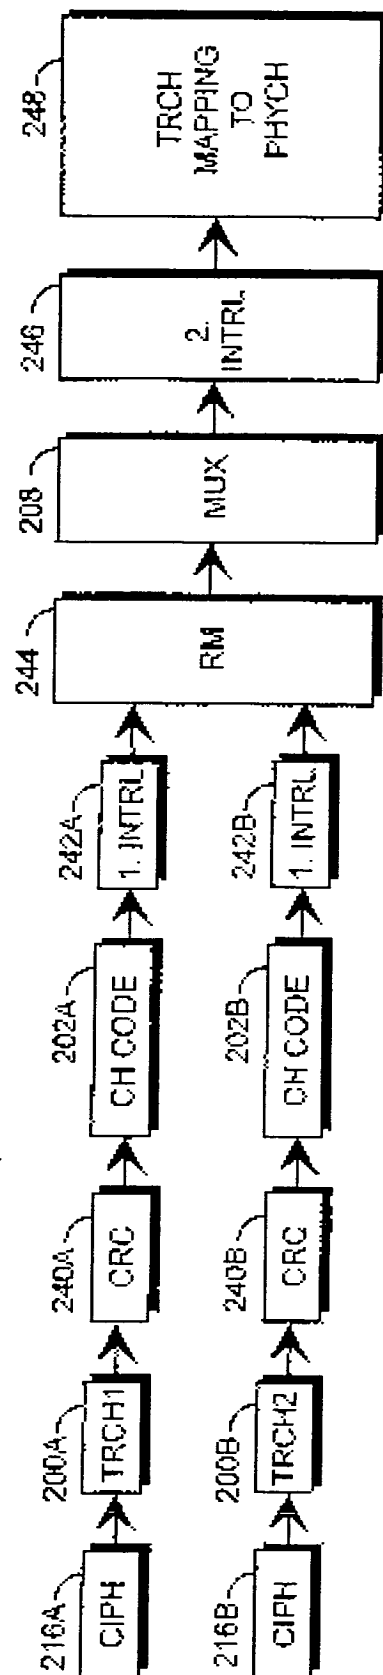


Fig 2B

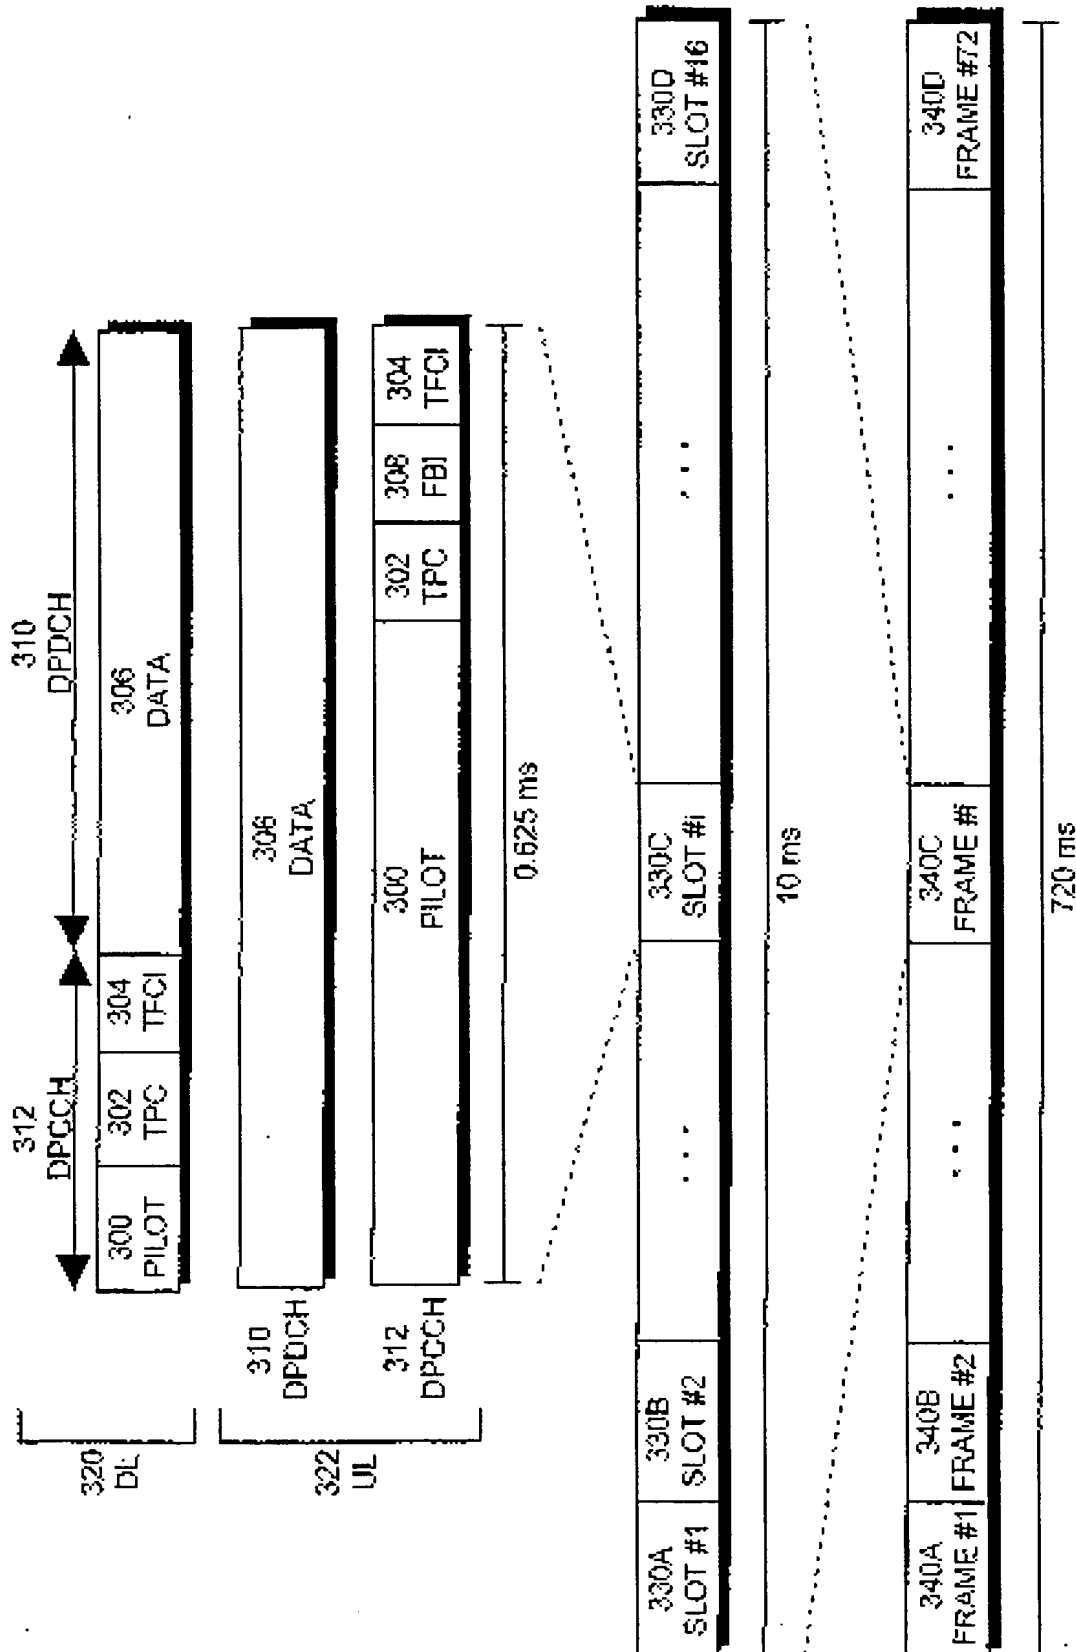


Fig 3

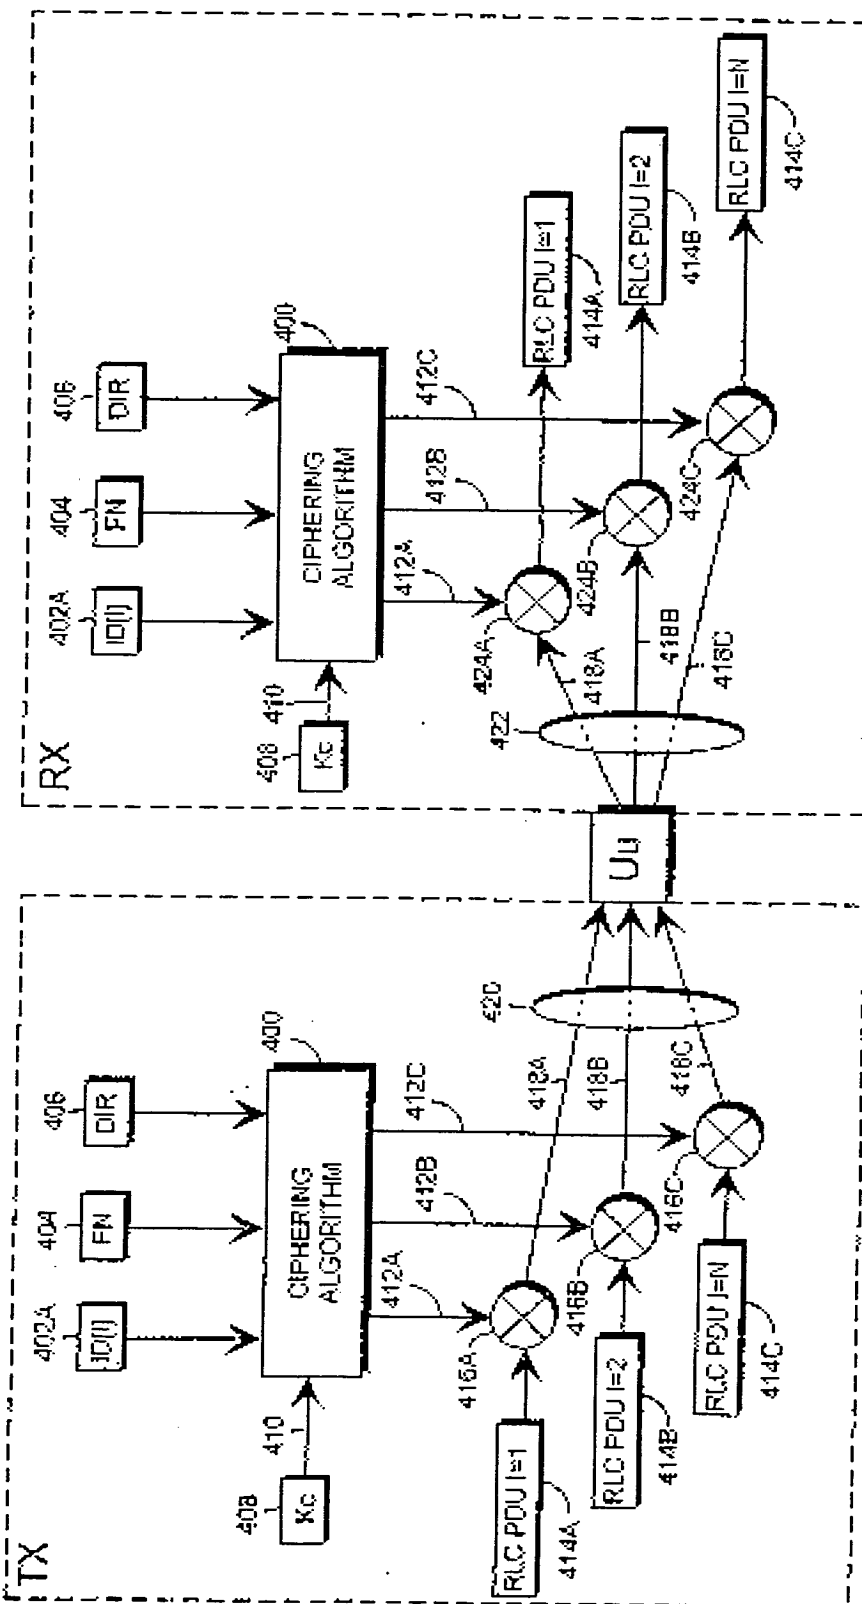


Fig 4A

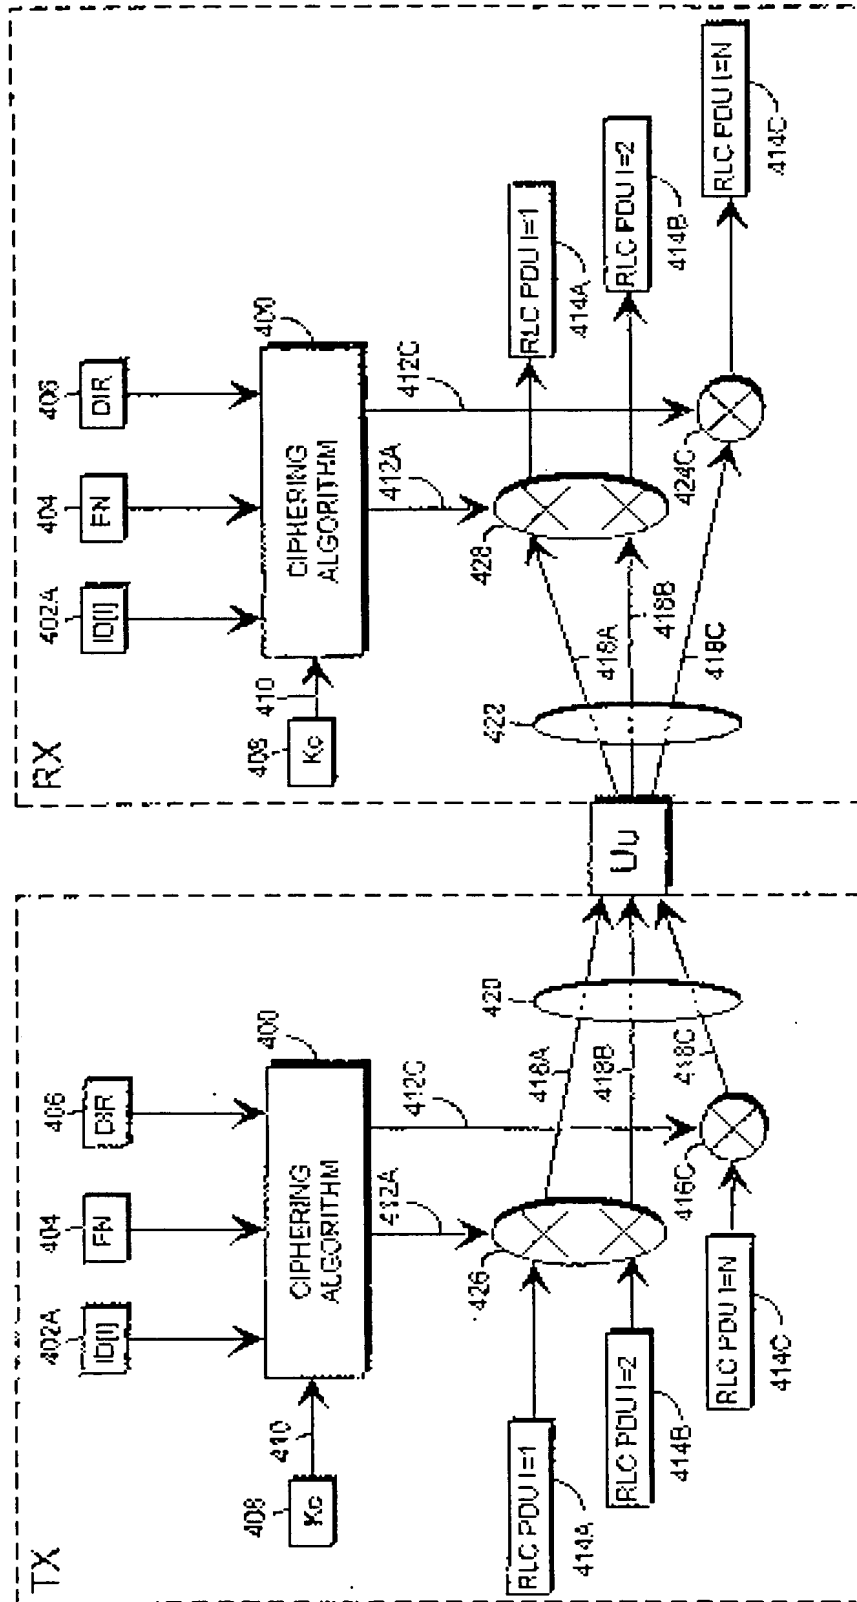


Fig 4B

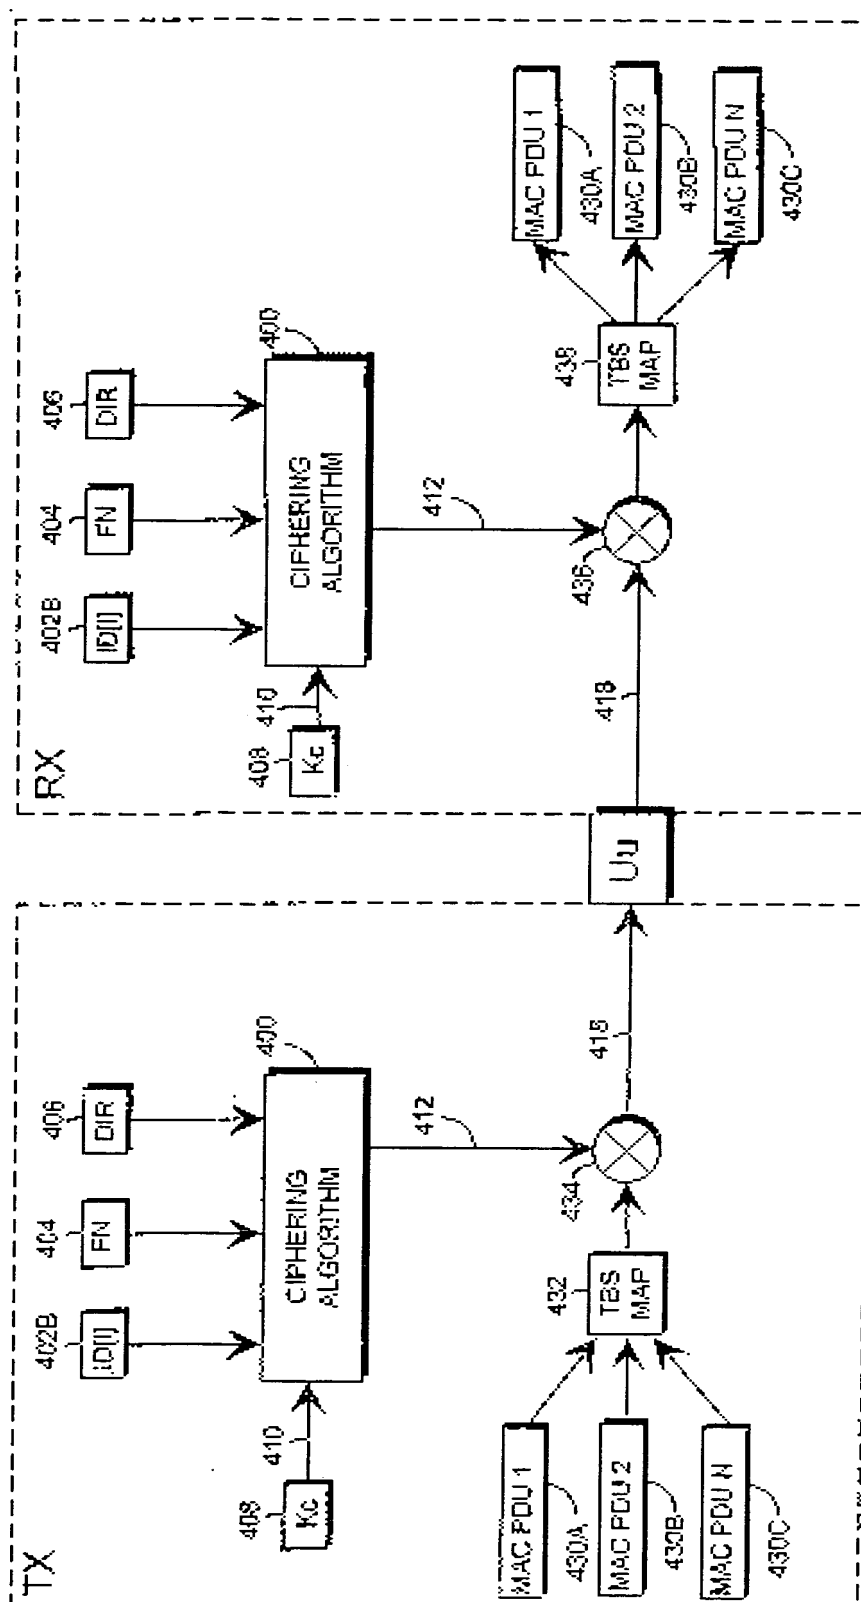


Fig 4C

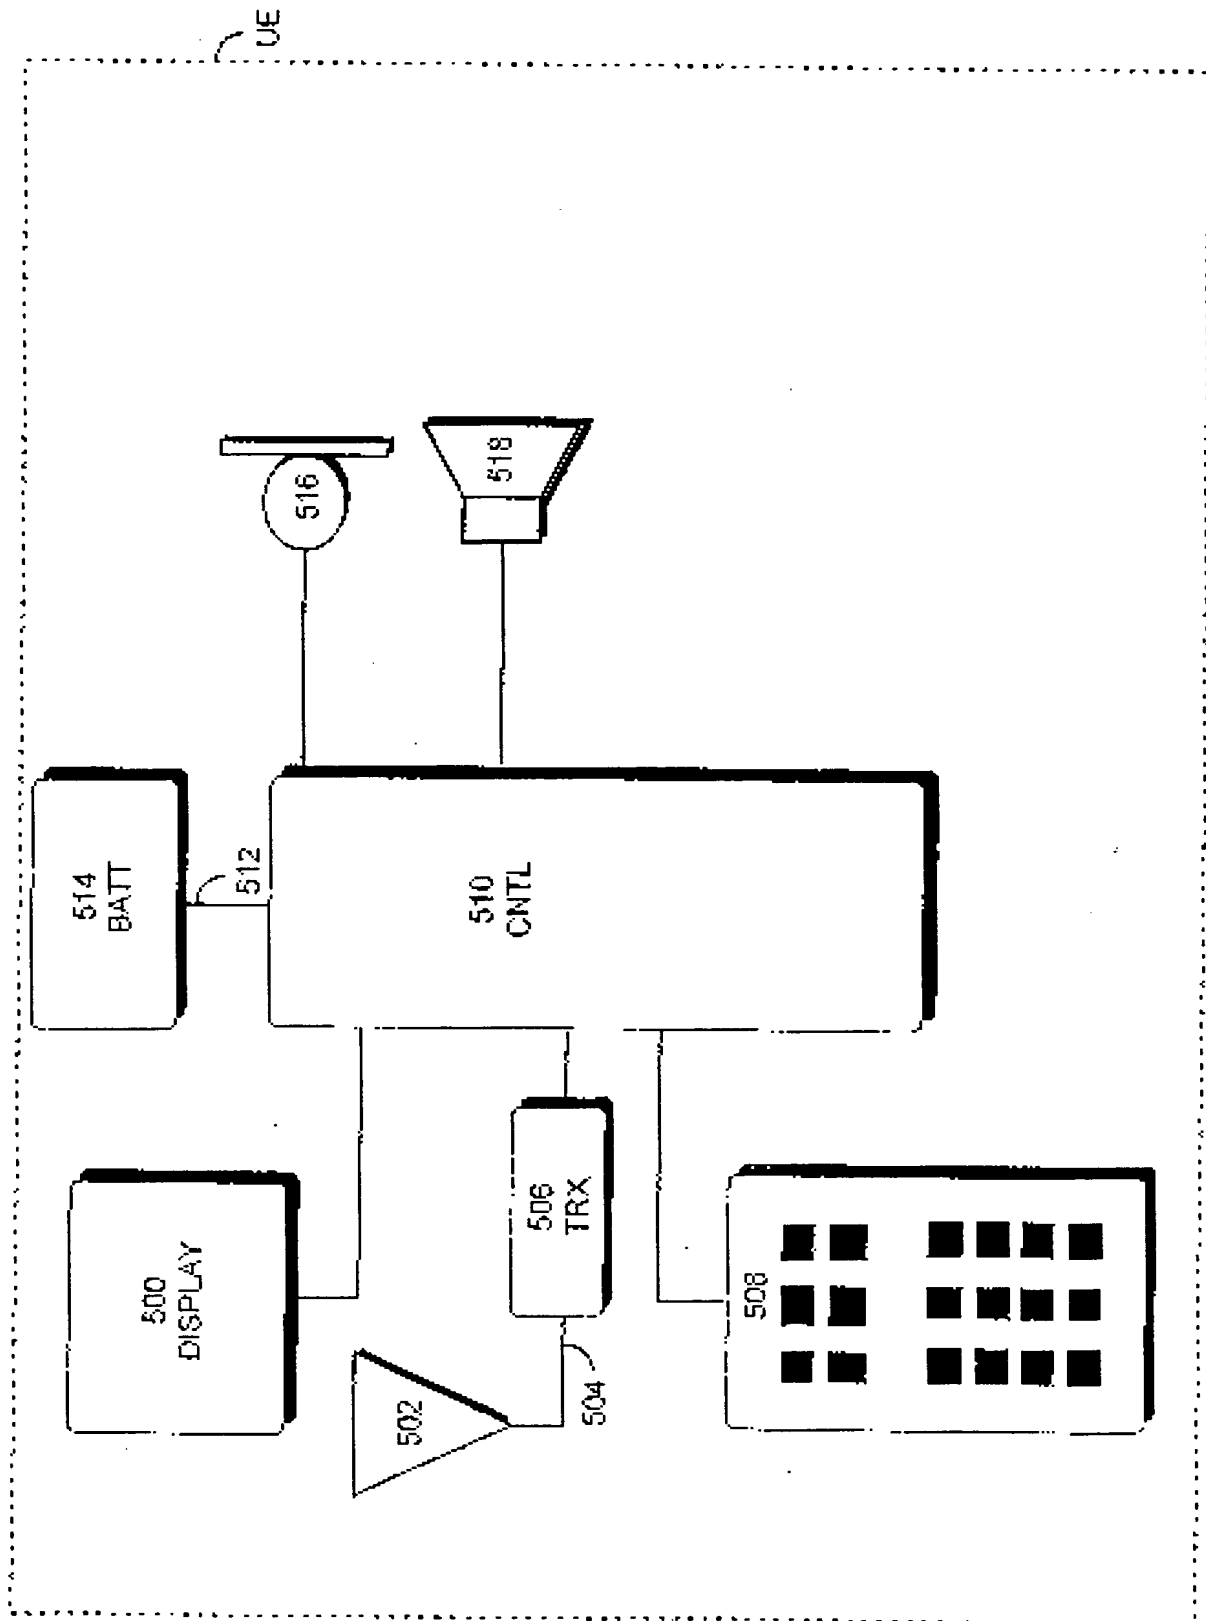


Fig 5

10/13

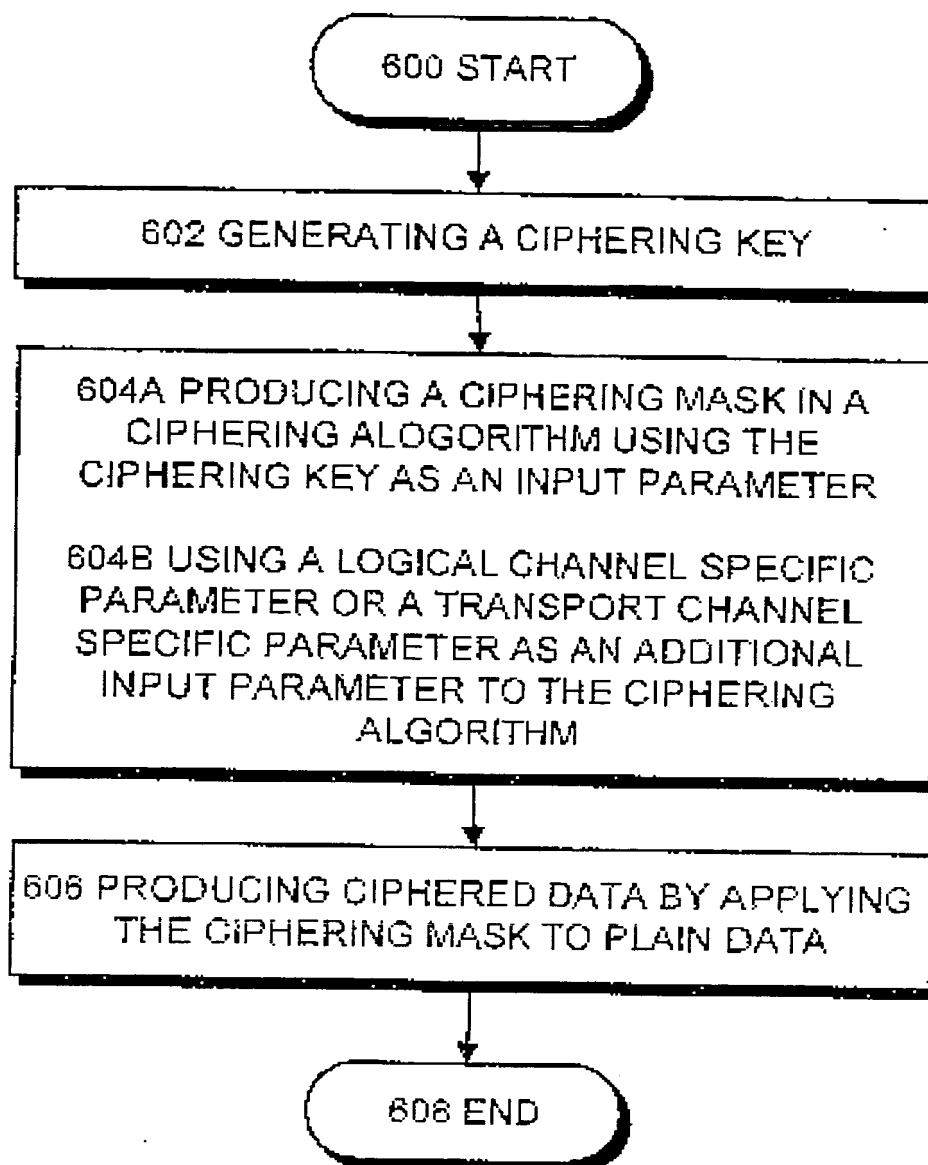


Fig 6

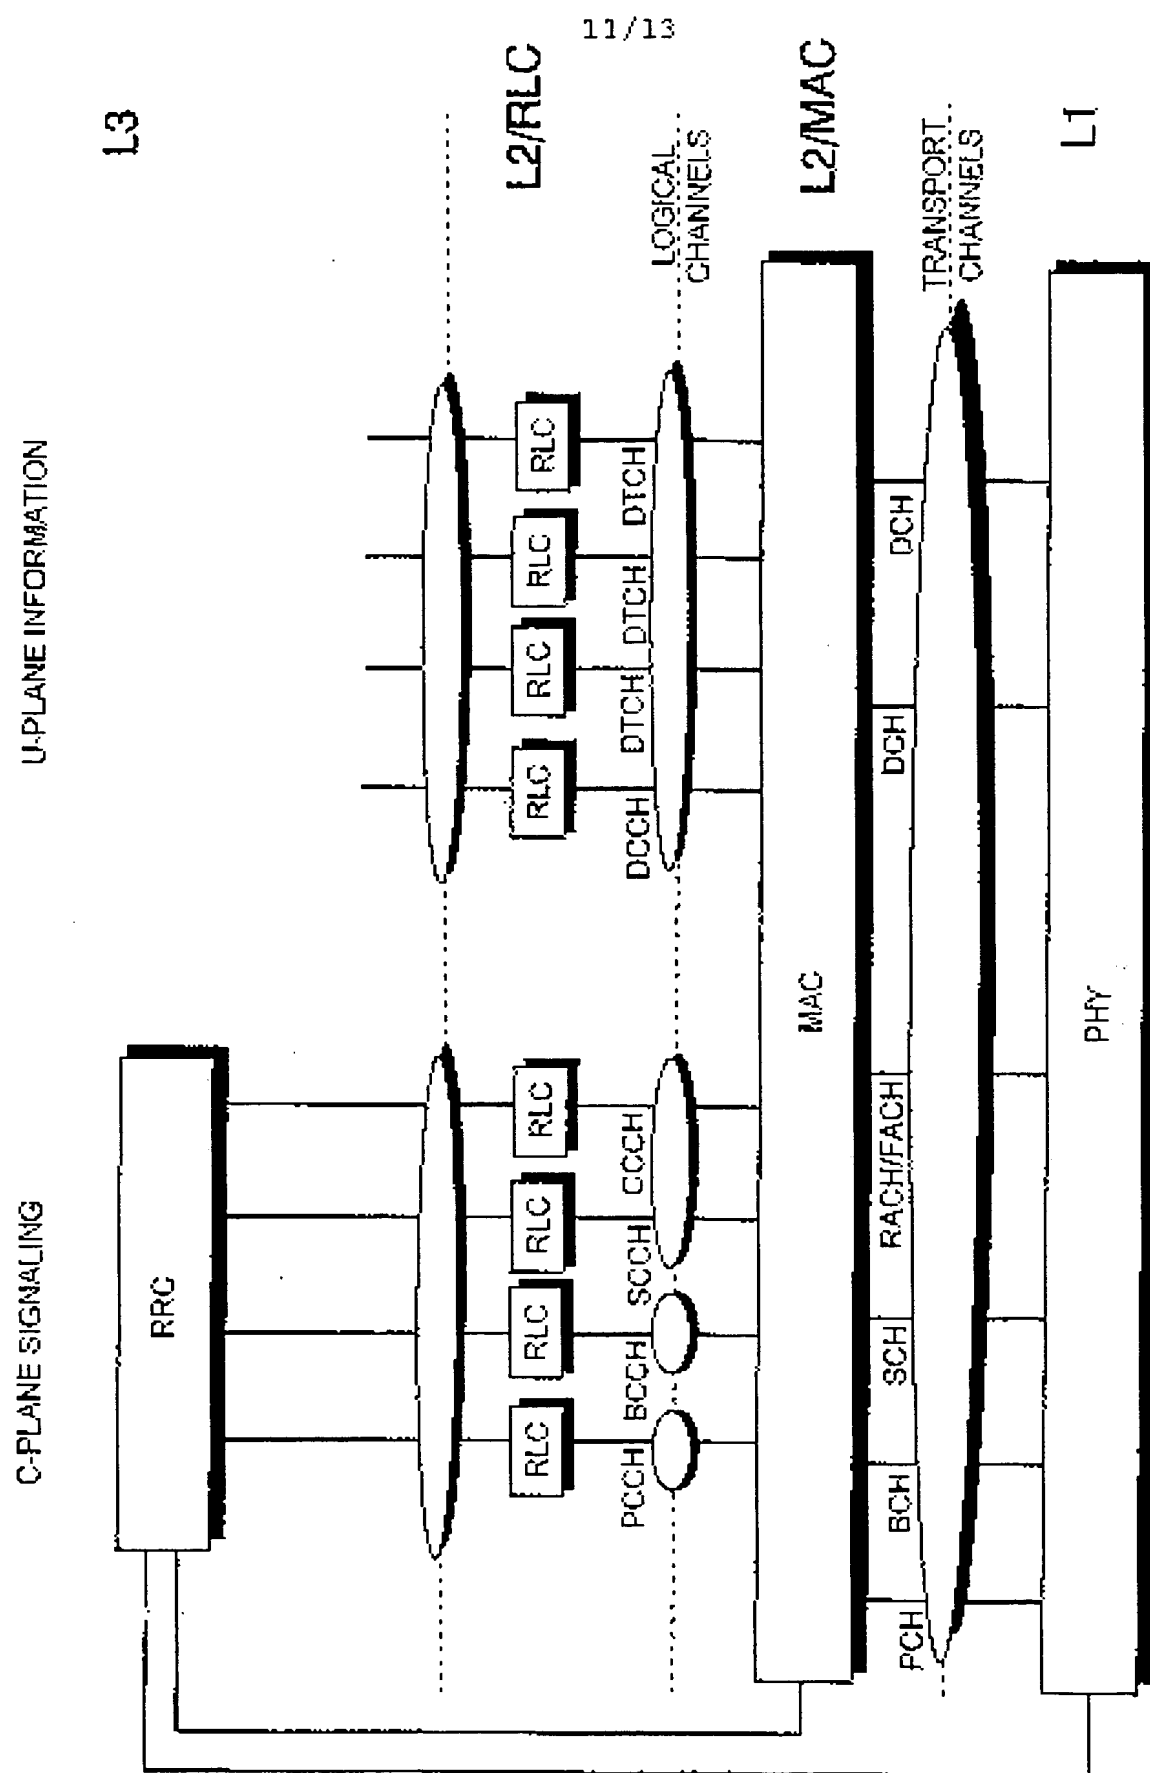


Fig 7A

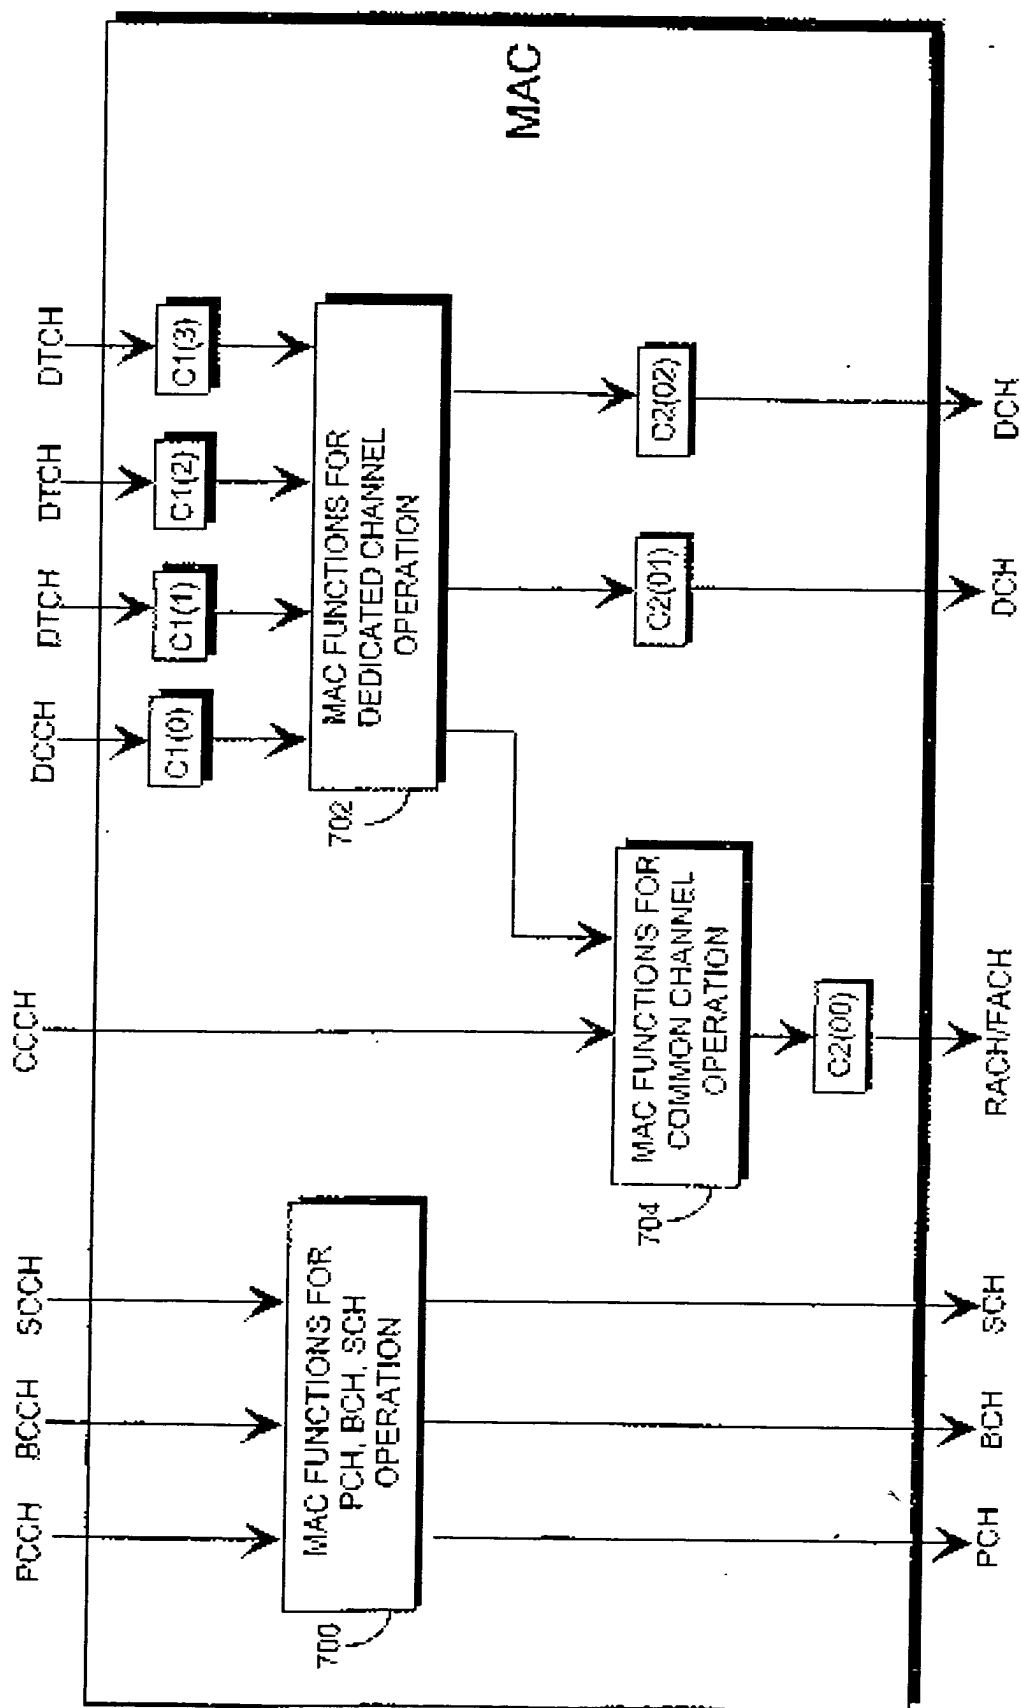


Fig 7B

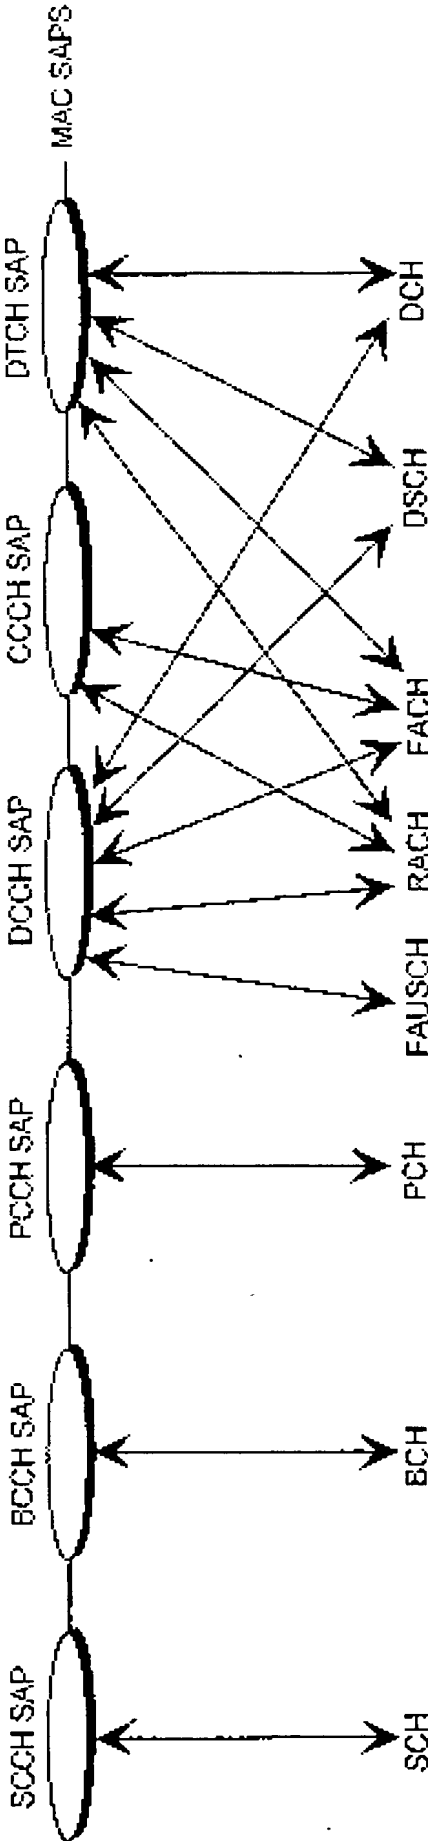


Fig 7C

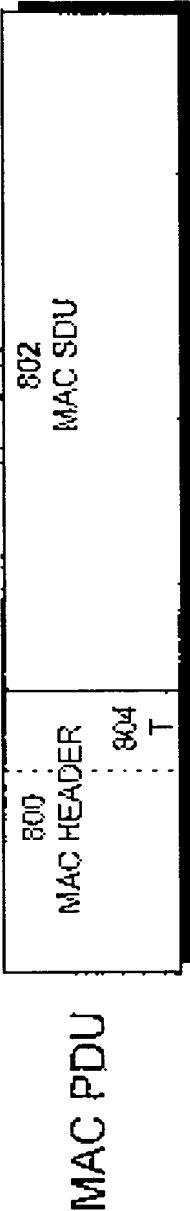


Fig 8

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)